

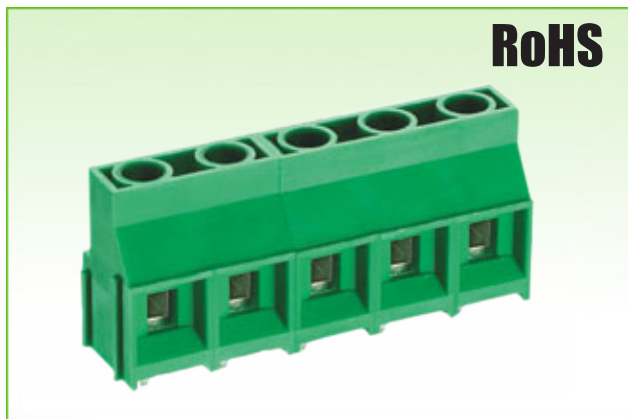


9.52mm Pitch


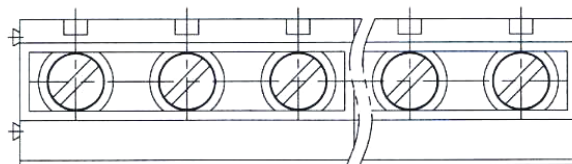


	UL [®] US
Rated Voltage	300V
Rated Current	30A
Insulation Withstand Voltage	AC 2000V / Min.
Insulation Resistance	500MΩ or More at DC500V
Temperature Range	-40°C to +105°C
Screw Torque	0.5N.m
Wire Range	10-26AWG

Units: mm



- ① Housing: PA66(V0)
- ② Block: Brass, Nickel Plated
- ③ Solder Pin: Brass, Tin Plated
- ④ Screw: Steel, Zinc Plated

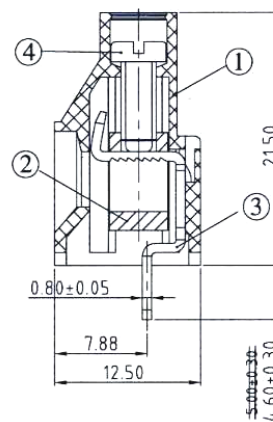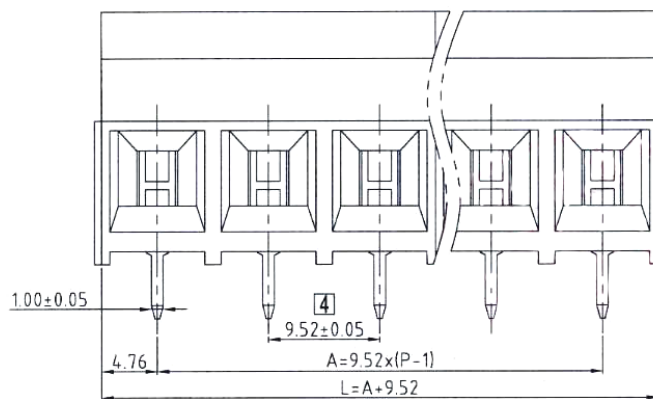

Part Numbering System:

106-952V - XXP - XXX

① ② ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	19.04	28.56	38.08	47.6	57.12	66.64	76.16	85.68	95.2	104.72	114.24	123.76
Dim A	9.52	19.04	28.56	38.08	47.6	57.12	66.64	76.16	85.68	95.2	104.72	114.24
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	133.26	142.8	152.32	161.84	171.36	180.88	190.4	199.92	209.44	218.96	228.48	
Dim A	123.76	133.26	142.8	152.32	161.84	171.36	180.88	190.4	199.92	209.44	218.96	