






5.08mm Pitch

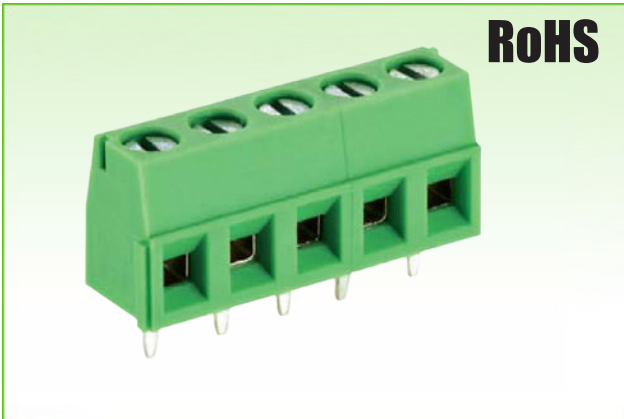

		
Rated Voltage	300V	250V
Rated Current	15A	15A
Wire Range	26-14 AWG	0.2-1.5mm <sup>2</sup>
Insulation Withstand Voltage	AC 2000V / Min	
Insulation Resistance	500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	
Screw, Torque	M2.5 , 0.4Nm Max	
Wire Stripping Length	6.2mm	

Units: mm

Housing: PA66(UL94-V0)  
Solder Pin: Copper, Tin Plated

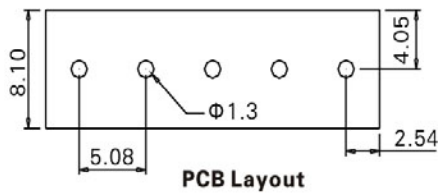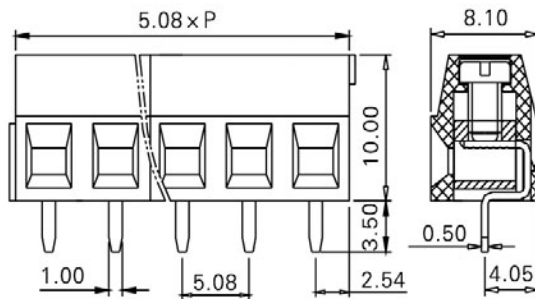

**Part Numbering System:**

108-508V - XXP - XXX

①      ②      ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green