


Light Emitting Diode Lamp

★ Package Dimensions

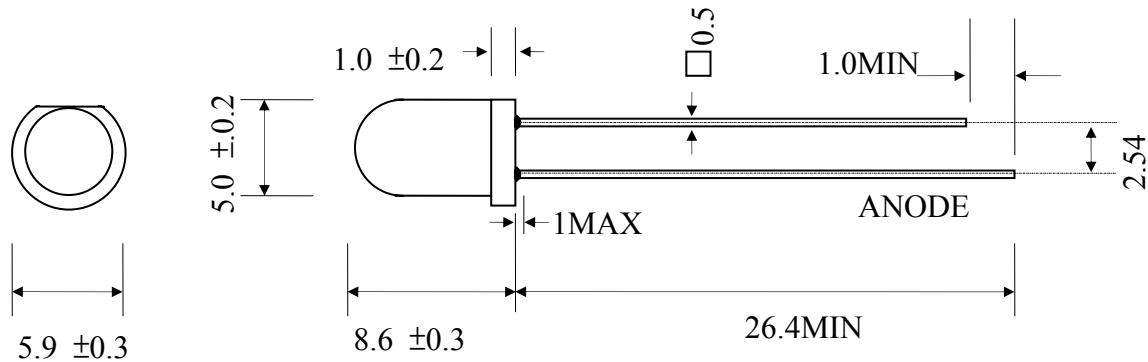

NOTE:

1. All dimensions are in millimeter.
2. Lead spacing is measured where the lead emerge from the package.

★Selection Guide

Part NO.	Chip		Lens Color	Viewing Angle $2\Theta_{1/2}$ (deg)
	Material	Emitted Color		
5-22-CD37-A	InGaN	Super Blue	Blue diffused	50

Light Emitting Diode Lamp

Part No: 5-22-CD37-A

★Absolute Maximum Ratings


(Ta=25°C)

Parameter	Symbol	MAX. Rating	Unit
Power Dissipation	Pd	120	mW
Continuous Forward Current	If	30	mA
Peak forward current (10 μ s Pulse)	Ifm	100	mA
Reverse Voltage	Vr	5.0	V
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+100	°C
Lead Soldering Temperature (1.6mm From Case Bottom)		260°C For 3 SEC	

★Electric-Optical Characteristics

Parameter	Symbol	Test Condition	MIN	TYP	MAX	Unit
Forward Voltage	Vf	If=20mA		3.2	3.8	V
Reverse Voltage	Vr	Ir=10uA	5			V
Luminous Intensity	IV	If=20mA	800	1200		mcd
Peak Emission Wavelength	λ_P	If=20mA		470		nm
Spectrum Width Of Half Value	$\Delta \lambda$	If=20mA		30		nm

★Characteristics Diagrams

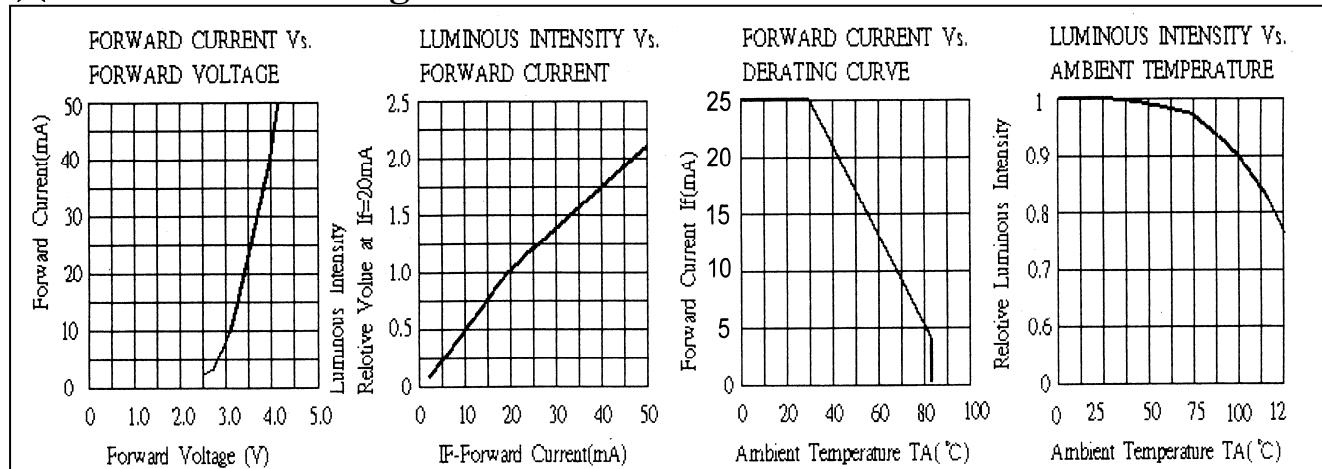



Light Emitting Diode Lamp

Part No: 5-22-CD37-A

★Reliability Test

No	Item	Test Condition	Test Hours/Cycles	Samples Tested	Acc./Rej
1	Room Temperature DC Operating Life	T _a =25°C, I _F =20mA	1000 Hrs	76	0/1
2	Thermal Shock	-10°C(5min)→(10sec)→+100°C (5min)	100 Cycles	76	0/1
3	Temperature Cycle	-40°C(30min) →(5min)→+85 °C(30min)	100 Cycles	76	0/1
4	High Temp./ High Humi. Test	85°C/85%RH	1000 Hrs	76	0/1
5	High Temperature Storage	T _a =100°C	1000 Hrs	76	0/1
6	Low Temperature Storage	T _a = - 40°C	1000 Hrs	76	0/1
7	Soldering Heat	260°C±5°C	3 Seconds	76	0/1