

Features

- High efficiency
- Low Power consumption
- General purpose leads
- Selected minimum intensities
- Available on tape and reel

Descriptions

- The series is specially designed for applications requiring higher brightness
- The LED lamps are available with different colors, intensities, epoxy colors, etc
- Superior performance in outdoor environment

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA


Applications

- Status indicators
- Commercial use
- Advertising Signs
- Back lighting

Device Selection Guide

| LED Part No. | Chip | | Lens Color |
|--------------|----------|---------------|----------------|
| | Material | Emitted Color | |
| 5-22-CD34 | AlGaInP | Yellow | Color Diffused |

Package Dimensions

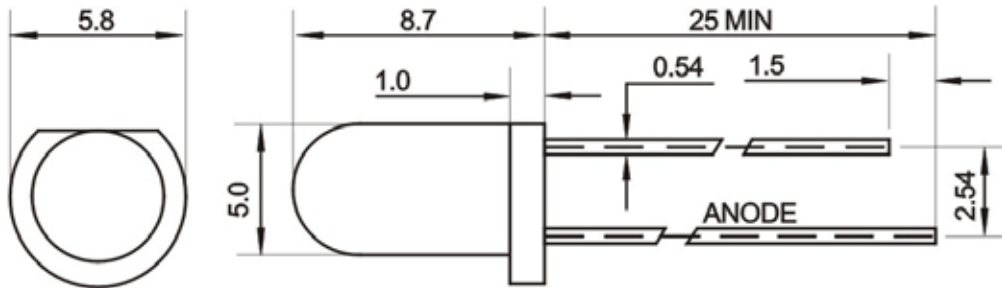

Notes:

Other dimensions are in millimeters, tolerance is 0.25mm except being specified.

Protruded resin under flange is 1.5mm Max LED.

Bare copper alloy is exposed at tie-bar portion after cutting.

Absolute Maximum Rating ($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Absolute Maximum Rating | Unit |
|-----------------------|-----------|-------------------------|------------------|
| Forward Pulse Current | I_{FPM} | 100 | mA |
| Forward Current | I_{FM} | 30 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 130 | mW |
| Operating Temperature | T_{opr} | -40~+80 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40~+100 | $^\circ\text{C}$ |
| Soldering Heat (5s) | T_{sol} | 260 | $^\circ\text{C}$ |

Electro-Optical Characteristics ($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|------|------|------|---------------|----------------------------|
| Luminous Intensity | I_v | 100 | 150 | --- | mcd | $I_F=20\text{mA}$ (Note 1) |
| Viewing Angle | $2\theta_{1/2}$ | --- | 40 | 50 | Deg | (Note 2) |
| Peak Emission Wavelength | λ_p | 580 | 590 | 595 | nm | $I_F=20\text{mA}$ |
| Spectral Line Half-Width | $\Delta\lambda$ | 15 | 20 | 25 | nm | $I_F=20\text{mA}$ |
| Forward Voltage | V_F | 1.9 | --- | 2.3 | V | $I_F=20\text{mA}$ |
| Reverse Current | I_R | --- | --- | 10 | μA | $V_R=5\text{V}$ |

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

Typical Electro-Optical Characteristics Curves

