






5.08mm Pitch

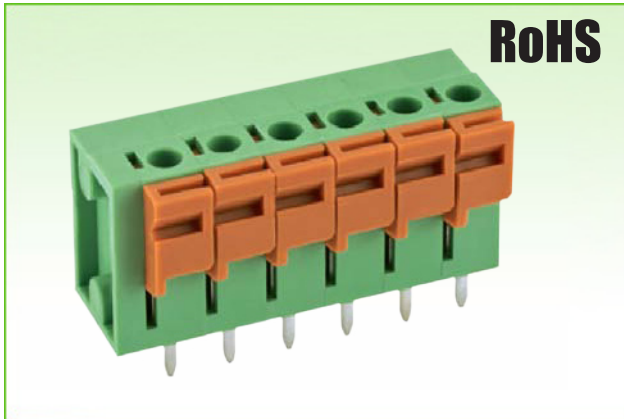

		
Rated Voltage	300V	320V
Rated Current	10A	10A
Wire Range	22-14 AWG	0.25-1.5mm ²
Insulation Withstand Voltage	AC 1600V / Min	
Insulation Resistance	500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	
Wire Stripping Length	10.0mm	

Units: mm

Housing: PA66(UL94-V0)
Solder Pin: Copper, Tin Plated
Clamp Spring: Stainless Steel

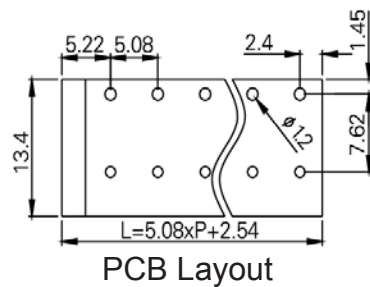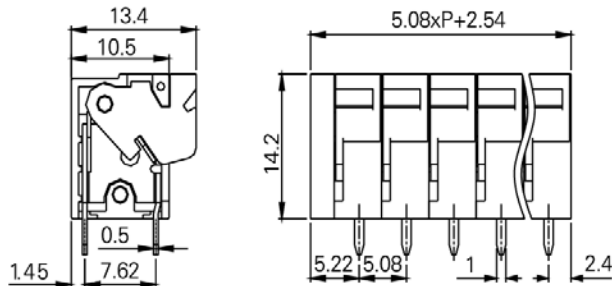

Part Numbering System:

500-508V - XXP - XXX

① ② ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green