





5.08mm Pitch

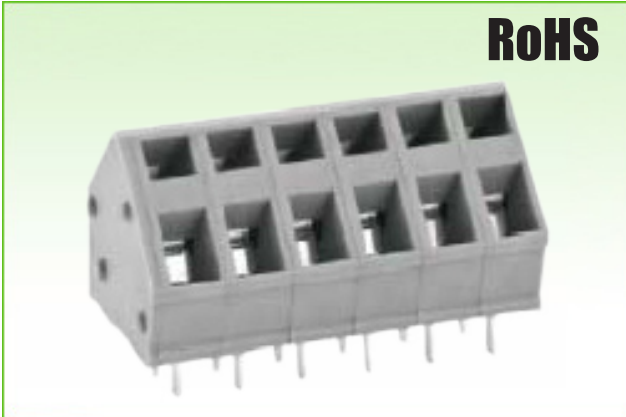

		
Rated Voltage	300V	320V
Rated Current	15A	17.5A
Insulation Withstand Voltage	AC 2000V / Min.	
Insulation Resistance	500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	
Wire Range	28-12AWG Sol. & Str.	0.2~2.5mm ² Sol. & Str.
Wire Orientation	135° (Wire to board)	
Stripping Length	6.5mm	
Wave Soldering	260°C 5 sec Max (Single Wave) 260°C 10 sec Max. (Double Wave)	

Units: mm

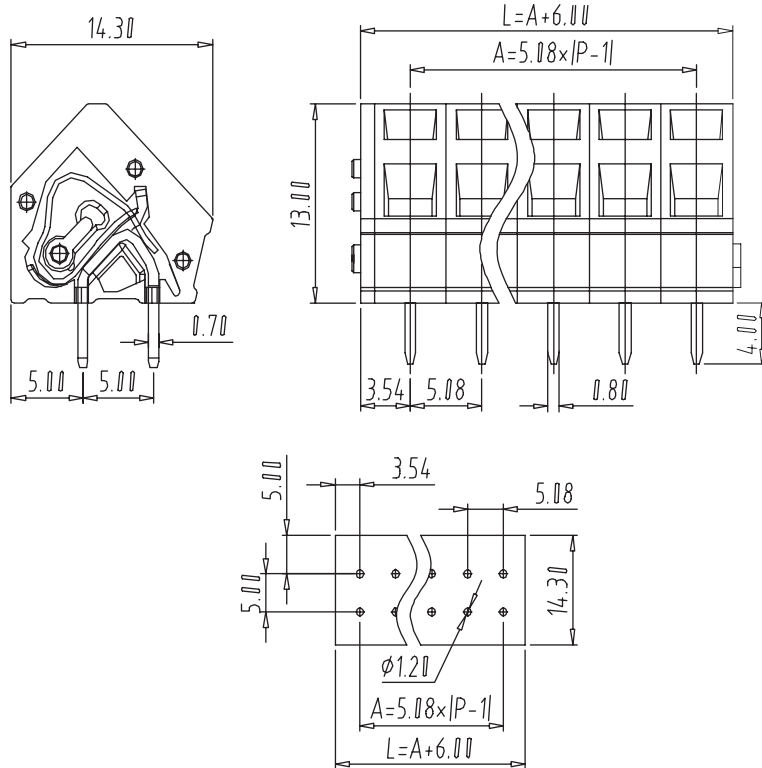

Housing: PA66(UL94V-0)
Pin: Copper, Tin Plated
Clamp Spring: Stainless Steel (GrNi)

Part Numbering System:

503-508 - XXP - XXX

- ①
- ②
- ③

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 24
- ③ Insulator Color: GRY = Grey