



Pos	A	B
04	7.20	2.54
06	9.74	5.08
08	12.28	7.62
10	14.82	10.16
12	17.63	12.70
14	19.90	15.24
16	22.44	17.78
18	24.98	20.3
20	27.52	22.86

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

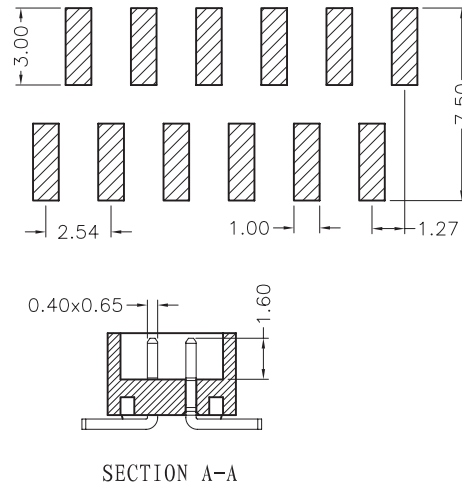

Specifications

- Current Rating: 1A
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- Dielectric Withstanding Voltage: 500V AC for 1 minute
- Operating Temperature: -40C to +85°C
- Insulator: High Temperature Plastic, UL94V-0 Rated
- Contact Material: Phosphor Bronze
- Contact Plating: Tin Plated over Nickel

Part Numbering System

BM127C-S - XX - T B

- Series
- # of Contact:
- Contact Plating:
T = Tin
- Packaging:
B = Tube
T = Tape & Reel

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	