## Pro

## **CTP-S18 SERIES** SURFACE MOUNT **Components** PRINTED CIRCUIT TEST POINTS

## **SPECIFICATIONS:**

Contact Material: 0.254mm x 1.016mm(0.010" x 0.040") Diameter. Phosphor Bronze #510 Alloy.


Contact Finish: 0.00254mm(0.0001") Minimum Matte Tin Finish over 0.00254mm(0.0001") Nickel Underplate.

Tape Material: 8mm(0.315") Wide Pitch: 4mm(0.157'')Conductive Polycarbonate Carrier meets ANSI/EIA-481 Standard

Pad Size: 1.778mm x 3.429mm(0.070" x 0.135")

Reel Size: 13" Diameter -5000/Reel or 8000/Reel 7" Diameter -1000/Reel

## **DIMENSIONS: UNITS: mm(inches)**

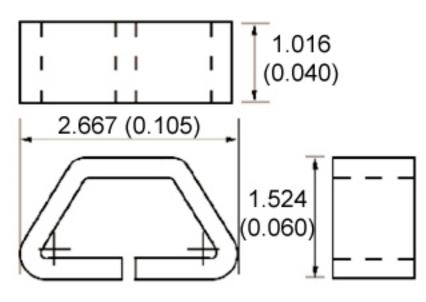

Part Number	Packaging
CTP-S18-1	1000/Reel
CTP-S18-5	5000/Reel
CTP-S18-8	8000/Reel

Certificate of Compliance with Directive 2002/95/EC RoHS and REACH Regulations EC 1907/2006. This is to certify that Pro Components designs, manufactures and supplies products to our customers that are in compliance with RoHS Directive 2002/95/EC and REACH Regulations EC 1907/2006. This also pertains to procurement of raw material, component parts and processes.

