
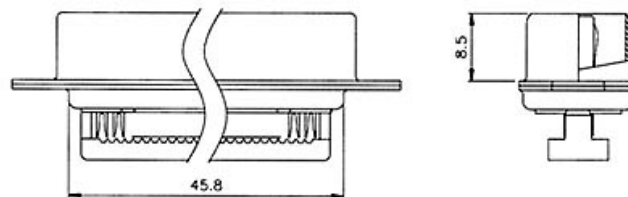


MATERIAL AND FINISHES:

- **INSULATOR:**
PBT Glass Filled
UL 94V-0
- **CONTACT:**
Copper Alloy
- **SHELL:**
Steel
- **HOOD:**
Steel
- **PLATING:**
 - Contact
 - 1- Gold Flash (Complete)
 - 2- Selective Gold Over Nickel Plated (Contact Area)
Tin/Lead Over Nickel Plated (Tail Area)
 - Shell
 - Nickel over Copper Plated
 - Hood
 - Nickel over Copper Plated


ELECTRICAL CHARACTERISTICS:

- **RATING CURRENT:**
1 Amp.
- **CONTACT RESISTANCE:**
< 25 Milliohm
- **INSULATION RESISTANCE:**
> 1000 Megohm at 500V
- **DIELECTRIC VOLTAGE:**
1000V at 1 Minute
- **OPERATING TEMPERATURE:**
-55°C to +105°C

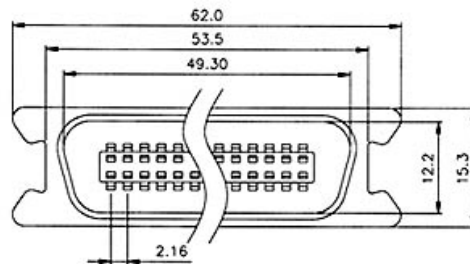

MALE

HOW TO ORDER:



1. Series
DC05

4. Contact Plating
S = Selective Gold
C = 15 μ " Gold
D = 30 μ " Gold

7. Fill it with "0"

2. Contact Number
36

5. Shell Plating
N = Nickel

8. Fill it with "0"

3. Contact Type
M = Male

6. Fill it with "0"

9. Insulator Color
2 = Blue
3 = Black