


MATERIAL AND FINISHES:

- **INSULATOR:**
PBT Glass Filled
UL 94V-0
- **CONTACT:**
Copper Alloy
- **SHELL:**
Steel
- **HOOD:**
Steel
- **PLATING:**
-Contact
1- Gold Flash (Complete)
2- Selective Gold Over Nickel Plated (Contact Area)
Tin/Lead Over Nickel Plated (Tail Area)
-Shell
Nickel over Copper Plated
-Hood
Nickel over Copper Plated

ELECTRICAL CHARACTERISTICS:

- **RATING CURRENT:**
1 Amp.
- **CONTACT RESISTANCE:**
< 25 Milliohm
- **INSULATION RESISTANCE:**
> 1000 Megohm at 500V
- **DIELECTRIC VOLTAGE:**
1000V at 1 Minute
- **OPERATING TEMPERATURE:**
-55°C to +105°C








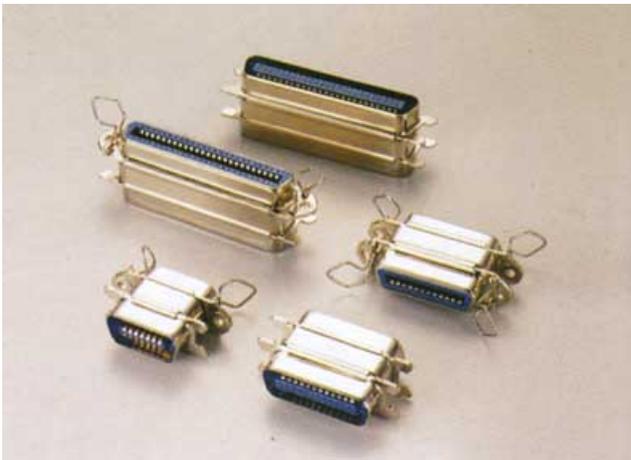


FEMALE Unit: mm


POSITION	A	B	C
14F	25.20	36.00	43.90
24F	36.00	46.80	54.70
36F	48.90	59.70	67.70
50F	64.10	74.90	82.80

MALE Unit: mm

POSITION	A	B	C
14M	25.50	36.00	43.90
24M	36.30	46.80	54.70
36M	49.30	59.70	67.70
50M	64.40	74.90	82.80

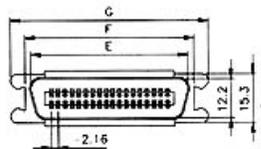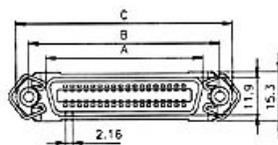

HOW TO ORDER:

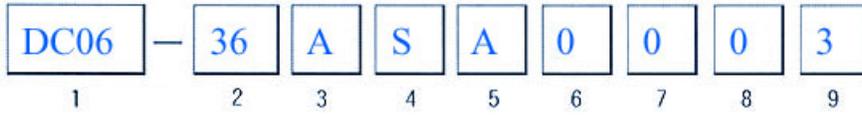

1. Series

DC06

4. Contact Plating

S = Selective Gold
C = 15 μ " Gold
D = 30 μ " Gold

7. Fill it with "0"

2. Contact Number

14 = 14/14
24 = 24/24
36 = 36/36
50 = 50/50

5. Latch Option

A = w/Latch
B = w/o Latch

8. Fill it with "0"

3. Contact Type

A = M/M
B = M/F
C = F/F

6. Fill it with "0"

9. Insulator Color

2 = Blue
3 = Black