

### MATERIAL AND FINISHES:

- **INSULATOR:**  
PBT Glass Filled  
UL 94V-0
- **CONTACT:**  
Brass (Male)  
Brass or Phosphor Bronze (Female)
- **SHELL:**  
Steel
- **PLATING:**  
-Contact  
1- Gold Flash (Complete)  
2- Selective Gold Over Nickel Plated (Contact Area)  
Tin/Lead Over Nickel Plated (Tail Area)  
-Shell  
Tin or Zinc over Copper Plated

### ELECTRICAL CHARACTERISTICS:

- **RATING CURRENT:**  
3 Amp.
- **CONTACT RESISTANCE:**  
< 15 Milliohm
- **INSULATION RESISTANCE:**  
> 3000 Megohm at 500V
- **DIELECTRIC VOLTAGE:**  
1000V at 1 Minute
- **OPERATING TEMPERATURE:**  
-55°C to +105°C









FEMALE Unit: mm

POSITION	A	B	C	D	E	F
15F	16.30	25.00	30.8	2.29	1.14	19.2
26F	24.60	33.30	39.2	2.29	1.14	27.7
44F	38.30	47.10	53.1	2.29	1.14	41.1
62F	54.80	63.50	69.4	2.41	1.20	57.3


MALE Unit: mm

POSITION	A	B	C	D	E	F
15M	16.92	25.00	30.8	2.29	1.14	19.2
26M	25.25	33.30	39.2	2.29	1.14	27.7
44M	38.96	47.10	53.1	2.29	1.14	41.1
62M	55.42	63.50	69.4	2.41	1.20	57.3




FEMALE



MALE




78 POSITION FEMALE

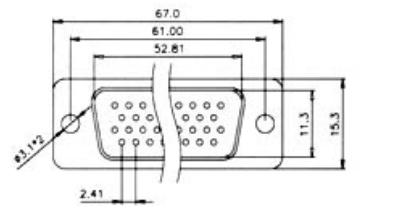


78 POSITION MALE

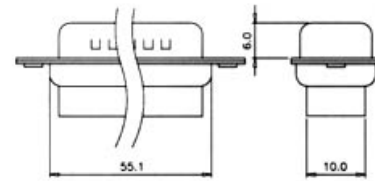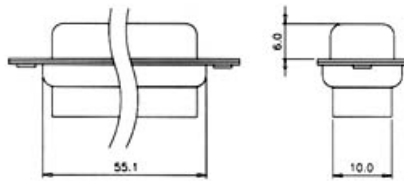


**PROCESS OPTION:**



FRONT RIVET




REAR RIVET



HEX SCREW + HEX NUT

**HOW TO ORDER:**



**1. Series**  
DH04

**2. Contact Number**  
15 26 44 62 78

**3. Contact Type**  
M = Male (Plastic Clip 15p Only)  
A = Male (Metal Clip)  
B = Female (Metal Clip)

**4. Fill it with "0"**

**5. Shell Plating**  
T = Tin  
N = Nickel  
Z = Zinc (Chromatic)  
P = Tin + Dimple  
Q = Nickel + Dimple

**6. Process Option**  
A = Through Hole  
B = Hex-Screw + 1.5mm Nut  
C = 3.8mm Open Hex Rivet  
D = 5.8mm Open Hex Rivet  
K = 2.5mm Open Hex Rivet

**7. Parts Option**  
A = Non Accessories  
B = Front Rivet  
E = Rear Rivet  
F = Rear Rivet + Loose Screws  
G = Rear Rivet + Fixed Screws

**8. Fill it with "0"**

**9. Insulator Color**  
3 = Black