




Housing: Die-Cast Aluminum, Painted Black  
 Blade: Injection Molded of Flame Retardant Polycarbonate, Black  
 Insulation Resistance: 100M $\Omega$ , 500VDC/min between bare wire and frame  
 Dielectric Strength: 1500VAC for one minutue  
 Operation Temperature: -20°C-70°C(Humidity 35%-85%RH)  
 Storage Temperature: -40°C-85°C(Humidity 35%-85%RH)  
 Motor Protection: Thermal Protected  
 Weight: 1600 g



**AC AXIAL FAN**  
**180x180x65mm**



| Model Number    | Voltage (VAC) | Frequency (Hz) | AirFlow (CFM) | Stat.Pres. (mm-H <sub>2</sub> O) | Noise (dBA) | Speed (RPM) | Current (mA) | Power (W) | Available Bearing | Curves |
|-----------------|---------------|----------------|---------------|----------------------------------|-------------|-------------|--------------|-----------|-------------------|--------|
| FA1865B11T7C-51 | 115           | 50/60          | 342.0/365.0   | 17.0/20.6                        | 58.0/61.0   | 2,800/3,200 | 490/660      | 56/74     | B                 | ①/②    |
| FA1865B22T7C-51 | 230           | 50/60          | 352.0/394.0   | 17.0/20.6                        | 58.0/61.0   | 2,900/3,300 | 260/330      | 58/76     | B                 | ①/②    |

• For "Wire Lead" version, change the "T" in the model number to "W".

Specifications are subject to change without notice

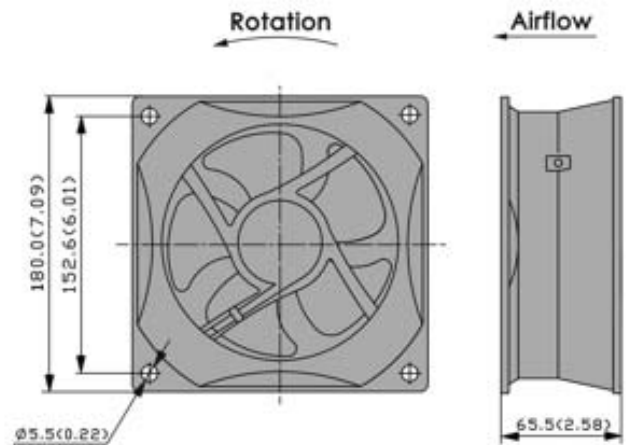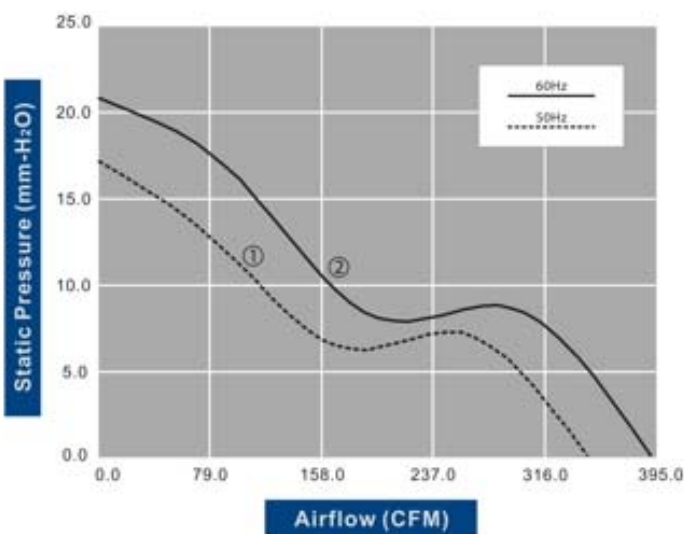

unit: mm(inch)