




Housing: Die-Cast Aluminum, Painted Black
 Blade: Injection Molded of Flame Retardant Polycarbonate, Black
 Insulation Resistance: 100M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 1500VAC for one minute
 Operation Temperature: -20°C-70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C-85°C(Humidity 35%-85%RH)
 Motor Protection: Thermal Protected
 Weight: 1600 g



AC AXIAL FAN
180x180x90mm



| Model Number | Voltage (VAC) | Frequency (Hz) | AirFlow (CFM) | Stat.Pres. (mm-H ₂ O) | Noise (dBA) | Speed (RPM) | Current (mA) | Power (W) | Available Bearing | Curves |
|-----------------|---------------|----------------|---------------|----------------------------------|-------------|-------------|--------------|-----------|-------------------|--------|
| FA1890B11T7C-51 | 115 | 50/60 | 376.0/409.0 | 16.3/17.1 | 58.0/61.0 | 2,800/3,000 | 470/660 | 55/77 | B | ①/② |
| FA1890B22T7C-51 | 230 | 50/60 | 378.0/434.0 | 16.3/17.1 | 58.0/61.0 | 2,800/3,200 | 250/330 | 58/76 | B | ①/② |

• For "Wire Lead" version, change the "T" in the model number to "W".

Specifications are subject to change without notice

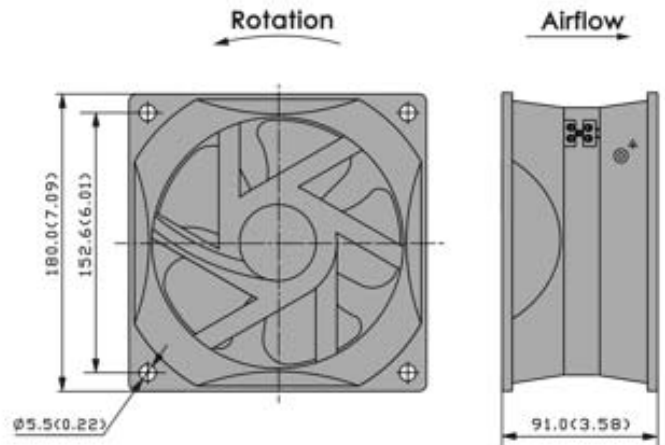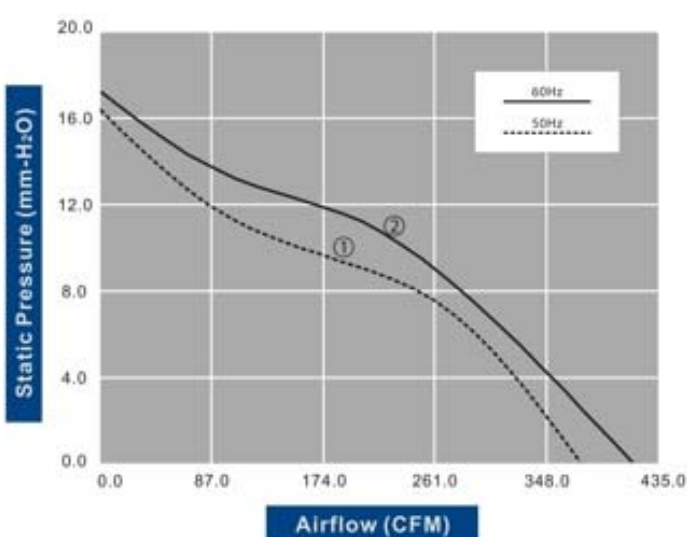

unit: mm(inch)