



Housing: Die-Cast Aluminum, Painted Black  
 Blade: Thermoplastic UL 94V-0 P.B.T.  
 Insulation Resistance: 100M $\Omega$ , 500VDC/min between bare wire and frame  
 Dielectric Strength: 1500VAC for one minute  
 Operation Temperature: -10°C-70°C(Humidity 35%-85%RH)  
 Storage Temperature: -40°C-85°C(Humidity 35%-85%RH)  
 Motor Protection: Thermal Protected  
 Weight: 208 g

**AC AXIAL FAN**  
**80x80x25mm**





**SS IP**

Model Number	Voltage VAC	Frequency Hz	AirFlow CFM	Stat.Pres. mm-H <sub>2</sub> O	Noise dBA	Speed RPM	Current mA	Power W	Avail Bearing	Curves
FA8025B11T5-61	115	50/60	14.2/19.3	1.4/2.7	20.7/25.6	1,700/2,200	130/130	13/11	B, S	①/②
FA8025B11T7-61	115	50/60	22.3/27.4	3.3/5.0	29.6/34.5	2,400/2,900	130/130	13/11	B, S	③/④
FA8025B22T5-61	230	50/60	14.2/19.3	1.4/2.7	20.7/25.6	1,700/2,200	100/100	13/11	B, S	①/②
FA8025B22T7-61	230	50/60	22.3/27.4	3.3/5.0	29.6/34.5	2,400/2,900	100/100	13/11	B, S	③/④

- For Wire lead version, change "T" in the model number to "W".
- For Sleeve Bearing version, change "B" in the model number to "S".

Specification are subject to change without notice

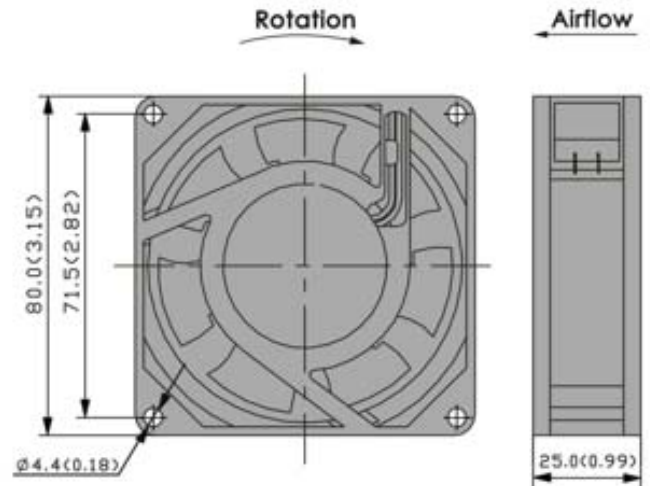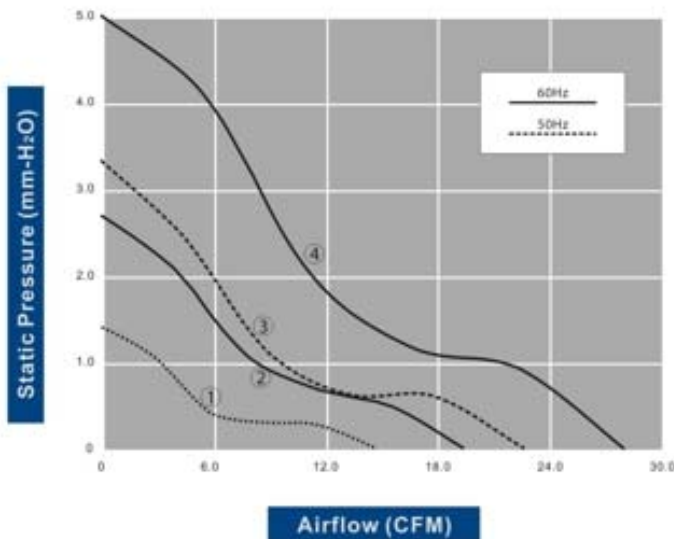

unit: mm(inch)