






FAC520

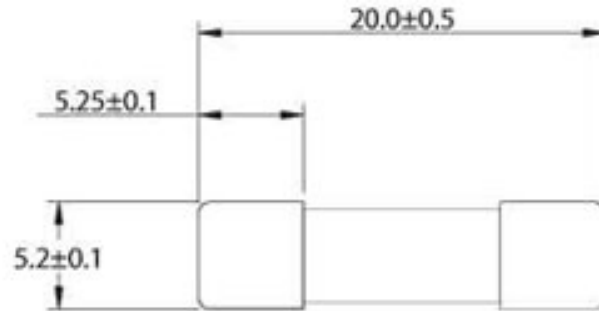


FAC520-P

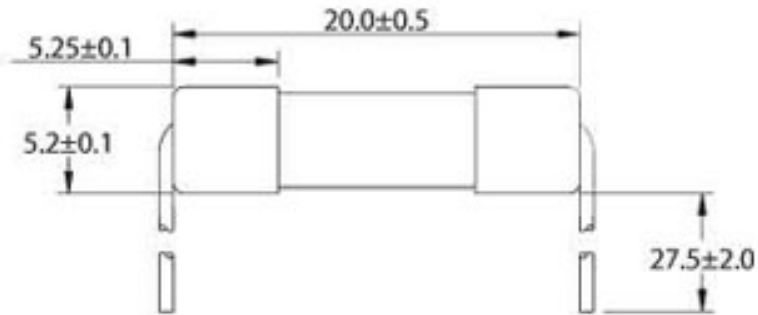

FAC520-PA

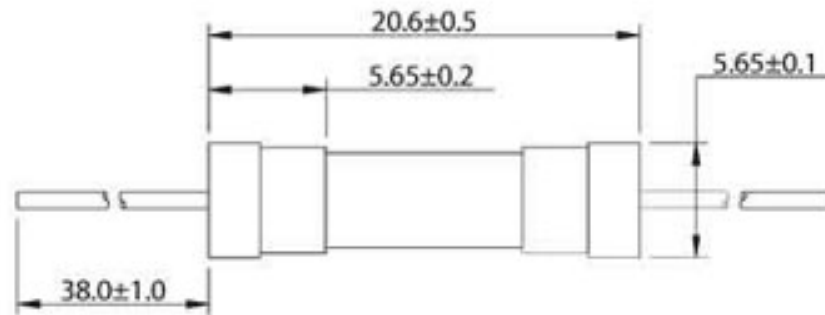

FAC520-PR

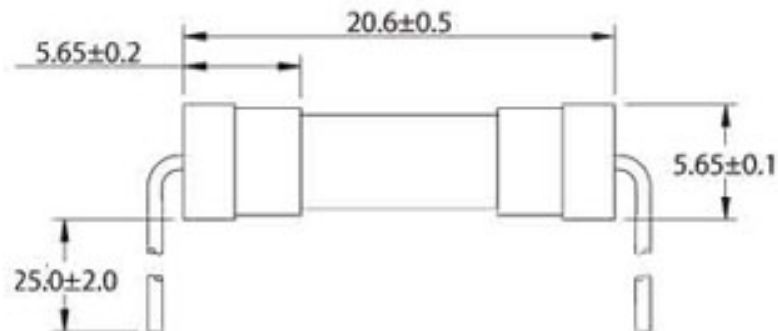

Construction: Ceramic Tube

Rated current: 0.05A-30A

Rated Voltage: 125V/250V

Standard: UL248, CSA C22.2 248

Electrical Characteristic

Rated Current	1 In	1.35 In	2 In
In	Min.	Max.	Max.
0.05A-30A	4 h	3600 S	120 S



FAC520 Series
Fast Acting, Ceramic Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage
FAC520-0.050-__	50mA	35A @ 250V/AC 10KA @ 125V/AC	125V/250V
FAC520-0.063-__	63mA		
FAC520-0.080-__	80mA		
FAC520-0.100-__	100mA		
FAC520-0.125-__	125mA		
FAC520-0.160-__	160mA		
FAC520-0.200-__	200mA		
FAC520-0.250-__	250mA		
FAC520-0.300-__	300mA		
FAC520-0.315-__	315mA		
FAC520-0.400-__	400mA		
FAC520-0.500-__	500mA		
FAC520-0.600-__	600mA		
FAC520-0.630-__	630mA		
FAC520-0.700-__	700mA		
FAC520-0.800-__	800mA		
FAC520-001-__	1A		
FAC520-1.25-__	1.25A	100A @ 250V/AC 10KA @ 125V/AC	
FAC520-1.50-__	1.5A		
FAC520-1.60-__	1.6A		
FAC520-002-__	2A		
FAC520-2.50-__	2.5A		
FAC520-003-__	3A		
FAC520-3.15-__	3.15A		
FAC520-3.50-__	3.5A		
FAC520-004-__	4A	200A @ 250V/AC 10KA @ 125V/AC	
FAC520-005-__	5A		
FAC520-006-__	6A		
FAC520-6.30-__	6.3A		
FAC520-007-__	7A		
FAC520-008-__	8A		
FAC520-010-__	10A		
FAC520-012-__	12A	10KA @ 125V/AC	
FAC520-013-__	13A		
FAC520-015-__	15A		
FAC520-016-__	16A		
FAC520-020-__	20A		
FAC520-025-__	25A		
FAC520-030-__	30A		

└─ Style Options: Nil = Axial w/o Leads
P = Radial Straight Leads
PA = Axial with Leads
PR = Radial Bent Leads
ex. FAC520-3.15-PR