



Housing: Die-Cast Aluminum, Painted Black  
 Blade: Thermoplastic PBT, UL 94V-0  
 Insulation Resistance: 100M $\Omega$ , 500VDC/min between bare wire and frame  
 Dielectric Strength: 1500VAC for one minute  
 Operation Temperature: -10°C-70°C(Humidity 35%-85%RH)  
 Storage Temperature: -40°C-85°C(Humidity 35%-85%RH)  
 Motor Protection: Thermal Protected  
 Weight: 620 g

**AC BLOWER**  
**125x126x40mm**





SS

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H <sub>2</sub> O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA1231B11W5C-31	115	50/60	40.6/43.6	16.0/22.9	54.2/56.1	2,750/3,050	270/290	26/27	B,S	①/②
FBA1231B22W5C-31	230	50/60	40.6/43.6	16.0/22.9	54.2/56.1	2,750/3,050	130/130	26/27	B,S	①/②

• For "Sleeve" bearing version, change the "B" in the model number to "S".

Specifications are subject to change without notice

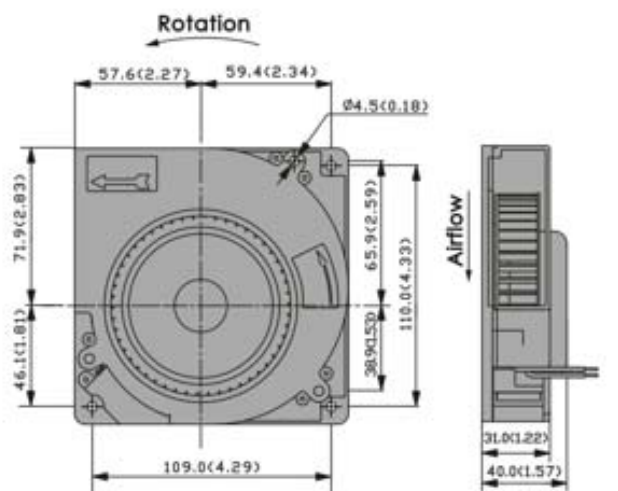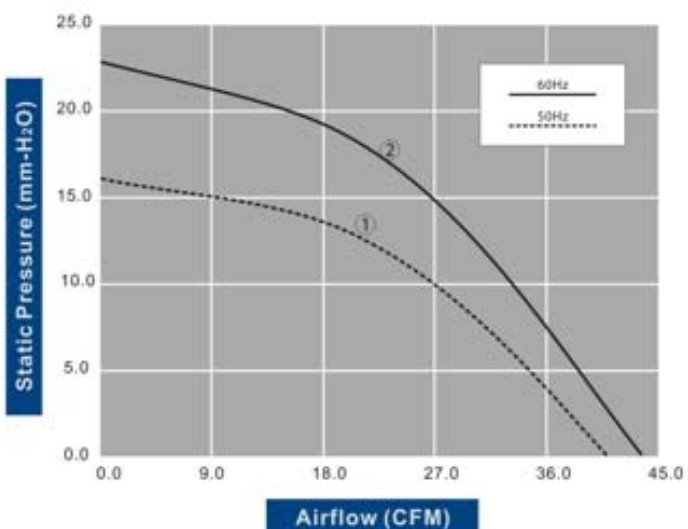

unit: mm(inch)