


Contact

Specifications

- Current Rating: 1 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 15 m ohms max.
- Dielectric Withstanding: AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material: Phosphor Bronze or Brass
- Insulator Material: Polyester, UL 94V-0, P.B.T.
- Contact Plated: See Options
- Standard: Selective Gold Flash

Part Numbering System

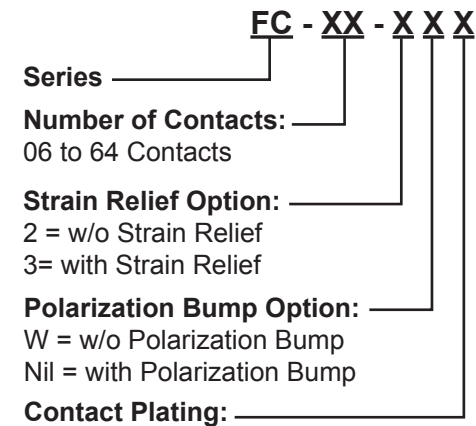

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	Nil : Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	

Pos.	Dimensions				Pos.	Dimensions			
	A	B	C	D		A	B	C	D
06	12.32	6.38	5.08	12.12	26	37.72	31.75	30.48	37.52
08	14.86	8.89	7.62	14.66	30	42.80	36.83	35.56	42.60
10	17.40	11.43	10.16	17.20	34	47.88	41.91	40.64	47.68
12	19.94	13.97	12.70	19.74	36	50.42	44.45	43.18	50.22
14	22.48	16.51	15.24	22.28	40	55.50	49.53	48.26	55.30
16	25.02	19.05	17.78	24.82	44	60.58	54.61	53.34	60.38
18	27.56	21.59	20.32	27.36	50	68.20	62.23	60.96	68.00
20	30.10	24.13	22.86	29.90	60	80.90	74.93	73.66	80.70
24	35.18	29.21	27.94	34.98	64	85.98	80.01	78.74	85.78