

Contact


* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	Nil: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	

Specifications

Current Rating: 2 Amps
 Insulator Resistance: 1000 Megohms min. at DC 500V
 Contact Resistance: 15 m ohms max.
 Dielectric Withstanding: AC 500V for 1 minute.
 Operating Temperature : -40°C ~ +105°C
 Contact Material: Phosphor Bronze or Brass
 Insulator Material: Polyester, UL94V-0 P.B.T.
 Contact Plated: See Options
 Standard: Selective Gold Flash

Part Numbering System

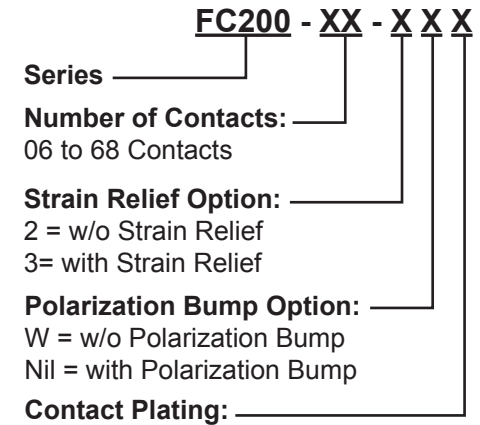

Pos.	Dimensions			Pos.	Dimensions			Pos.	Dimensions		
	A	B	C		A	B	C		A	B	C
06	11.20	5.00	4.00	24	29.20	23.00	22.00	44	49.20	43.00	42.00
08	13.20	7.00	6.00	26	31.20	25.00	24.00	48	53.20	47.00	46.00
10	15.20	9.00	8.00	28	33.20	27.00	26.00	50	55.20	49.00	48.00
12	17.20	11.00	10.00	30	35.20	29.00	28.00	54	59.20	53.00	52.00
14	19.20	13.00	12.00	32	37.20	31.00	30.00	56	61.20	55.00	54.00
16	21.20	15.00	14.00	34	39.20	33.00	32.00	60	65.20	59.00	58.00
18	23.20	17.00	16.00	36	41.20	35.00	34.00	62	67.20	61.00	60.00
20	25.20	19.00	18.00	38	43.20	37.00	36.00	64	69.20	63.00	62.00
22	27.20	21.00	20.00	40	45.20	39.00	38.00	68	73.20	67.00	66.00