
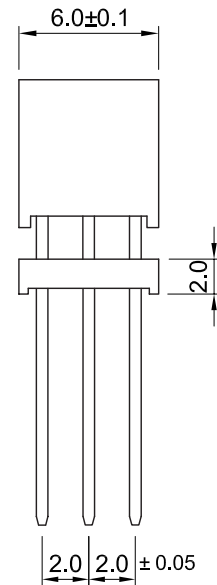
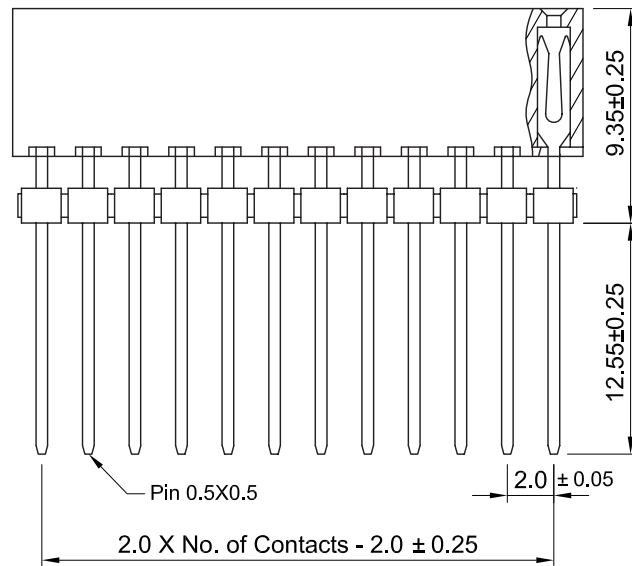


### Recommended P.C. Board Hole Layout



## Specifications

- Current Rating: 2 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 500V
- Operating Temperature : -40°C ~ +125°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Plated: See Option / Standard = Full Gold Flash

## Part Numbering System

**FH2D6320-ST- XX 60 XX - XX - X X N**

**Series**

**Height(H):**

93 = 9.35mm (Standard)  
xx = custom height

**Terminal Dimension(A):**

X2 = 12.55mm (Standard)  
xx = custom dimension

**No. of Pins**

**Contact Plating:**

**Packing Method:**

B = Tube

**Insulator Material:**

N = High Temperature Nylon-6T

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX' ± 1'
Units : mm	