


Recommended P.C. Board Hole Layout

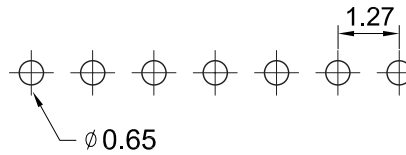

Specifications



Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric Withstanding: AC 300V
 Operating Temperature : -40°C ~ +125°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0, Nylon-6T
 Contact Plated: See Option / Standard = Full Gold Flash

Part Numbering System

FH7-SS-432124 - XX - X X N

Series _____
 No. of Pins _____
 Contact Plating _____
 Packing Method: _____
 B = Tube

Insulator Material: _____
 N = High Temperature Nylon-6T

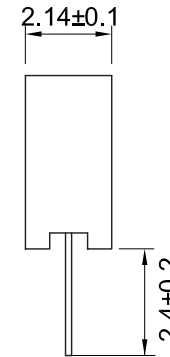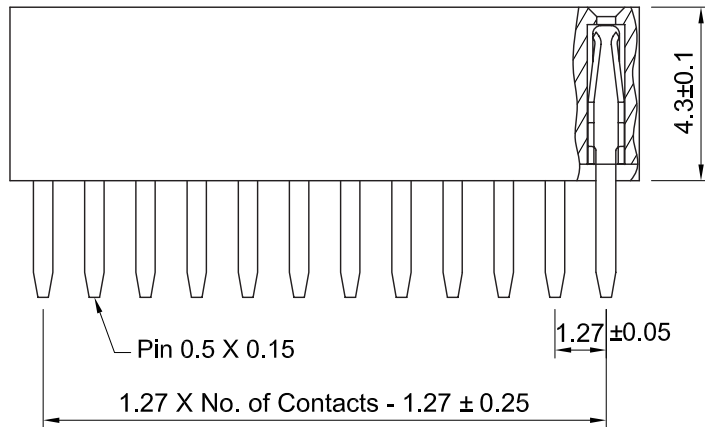

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. \pm 0.50	X.° \pm 5°
.X \pm 0.20	.X° \pm 2°
.XX \pm 0.10	.XX° \pm 1°
Units : mm	