

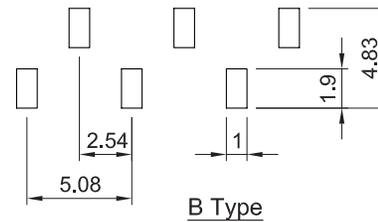


Recommended P.C. Board SMD Layout

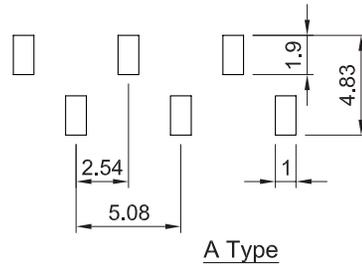


Specifications

- Current Rating: 3 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 600V
- Operating Temperature: -40°C~+125°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Plated: *see options below
- Standard: Full Gold Flash

Part Numbering System

Part Numbering System

FHC-SS-712542 - X XX - X X X X

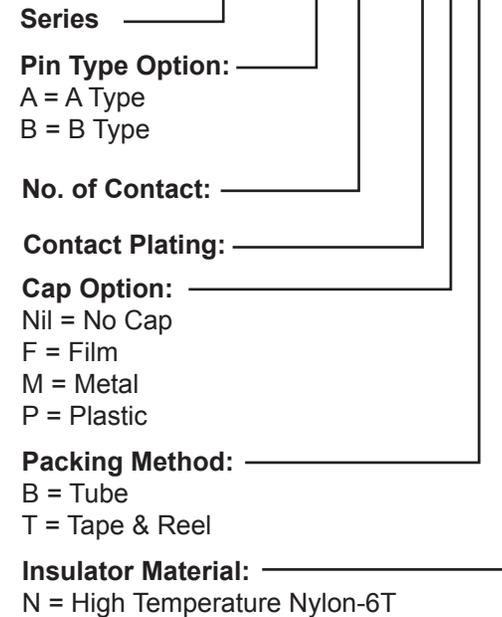

Series

Pin Type Option:

A = A Type

B = B Type

No. of Contact:

Contact Plating:

Cap Option:

Nil = No Cap

F = Film

M = Metal

P = Plastic

Packing Method:

B = Tube

T = Tape & Reel

Insulator Material:

N = High Temperature Nylon-6T

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	