

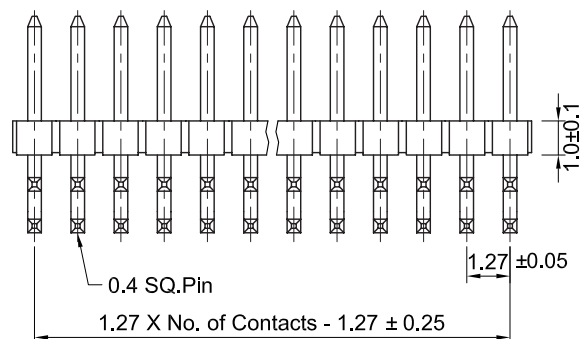
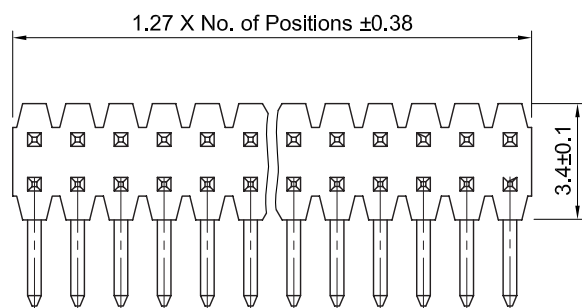


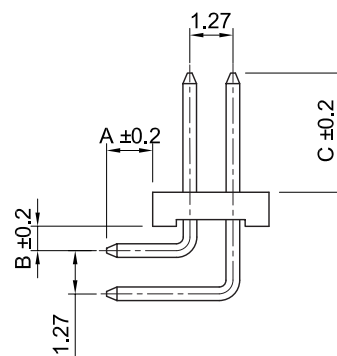

Recommended P.C. Board Hole Layout

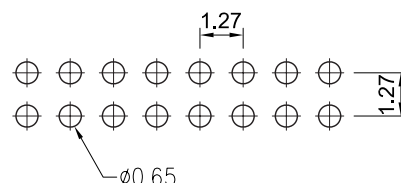

Specifications

Current Rating: 1 Amp
Insulator Resistance: 1000 Megohms min.
Contact Resistance: 20 m ohms max.
Dielectric Withstanding: AC 300V
Operating Temperature : -40°C ~ +105°C
Insulator Material: Polyester, UL 94V-0, Nylon-6T
Contact Material: Brass
Contact Plating: See Options,
Standard: Full Gold Flash

Part Numbering System

LD127-H1.0 - XX - A-B-C -X X N

Series

No. of Pins

Terminal Dimensions Required

A = ... , B = ... , C = ...

Contact Plating

Insulator Material:
N = Nylon-6T

Packing Method:
Nil = Bulk
B = Tube

Example: LD127-H1.0-12-4.27-1.3-5.8-XN
with 12pins, A= 4.27, B= 1.3, C= 5.8

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X" ± 2"
.XX ± 0.10	.XX" ± 1"
Units : mm	