
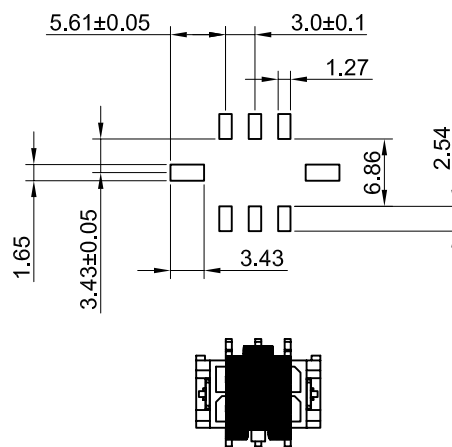
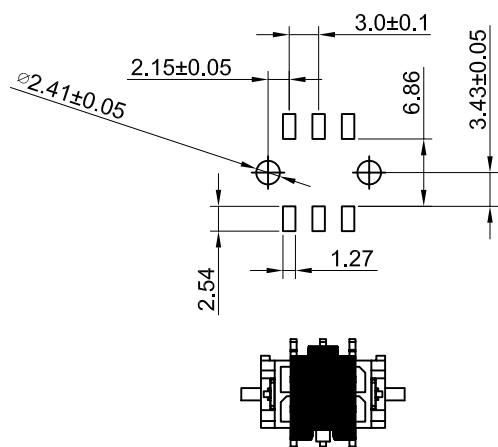
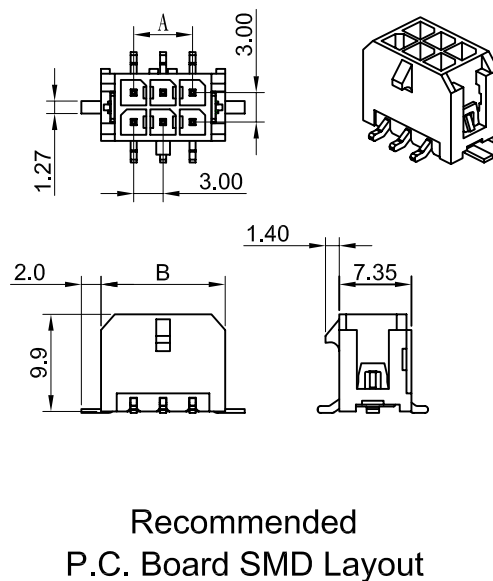


With Metal Clip

Without Metal Clip

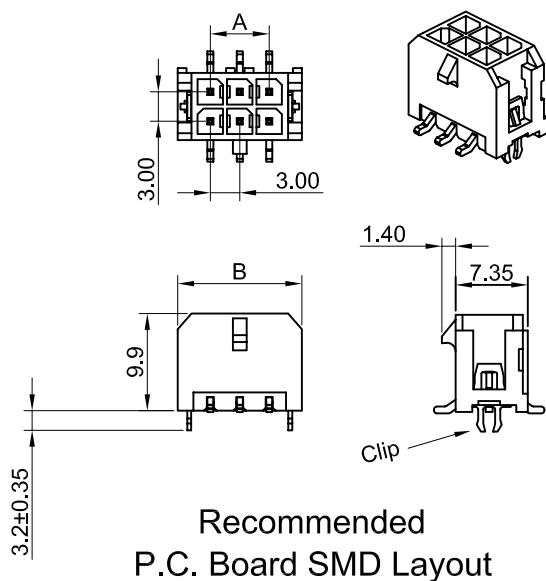

Specifications

Current Rating: 5 Amps
Insulator Resistance: 1000 Megohms min.
Contact Resistance: 20 mohms max.
Dielectric Withstanding: AC 1500V
Operating Temperature: -55°C ~ +125°C
Contact Material: Brass
Insulator Material: Polyester, UL 94V-0 LCP
Contact Plated: Standard: Tin plated.

Part Numbering System

MF300C-SD - XX - X X - T X

Series

No. Of Pins:
02~24

Post Option:
Nil = with Metal Clip
W = without Metal Clip

Cap Option:
Nil = No Cap
M = Metal Cap

Contact Plating:
T = Tin Plated

Packaging:
Nil = Bulk
B = Tube
T = Tape & Reel

Pins	Dimensions	
	A	B
2	-	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	