


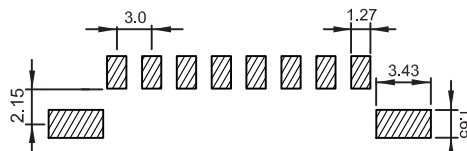


Recommended
P.C. Board SMD Layout



Without Metal Post

Recommended
P.C. Board SMD Layout

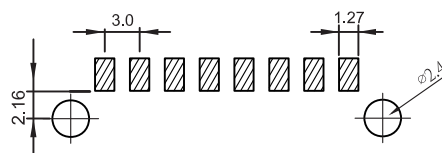

With Metal Post

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	

Specifications

Current Rating: 5 Amps
Insulator Resistance: 1000 Megohms min.
Contact Resistance: 20 mohms max.
Dielectric Withstanding: AC 1500V
Operating Temperature: -55°C ~ +125°C
Contact Material: Brass
Insulator Material: Polyester, UL 94V-0 LCP
Contact Plated: Standard: Tin plated.

Part Numbering System

MF300-SS - XX XX - T X

Series

No. Of Pins:
02~12

Post Option:

Nil = with Metal Post
W = without Metal Post

Cap Option:

Nil = No Cap
M = Metal Cap

Contact Plating:
T = Tin Plated

Packaging:

Nil = Bulk
B = Tube
T = Tape & Reel

Pins	Dimensions	
	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65