



Without Alignment Pin

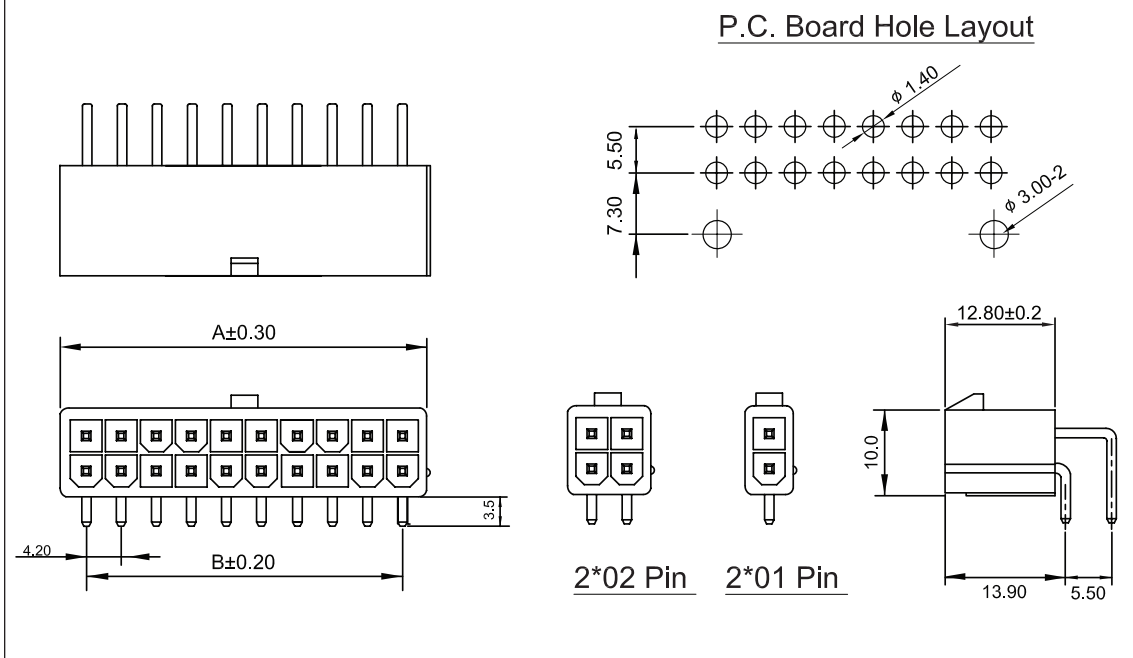

With Alignment Pin

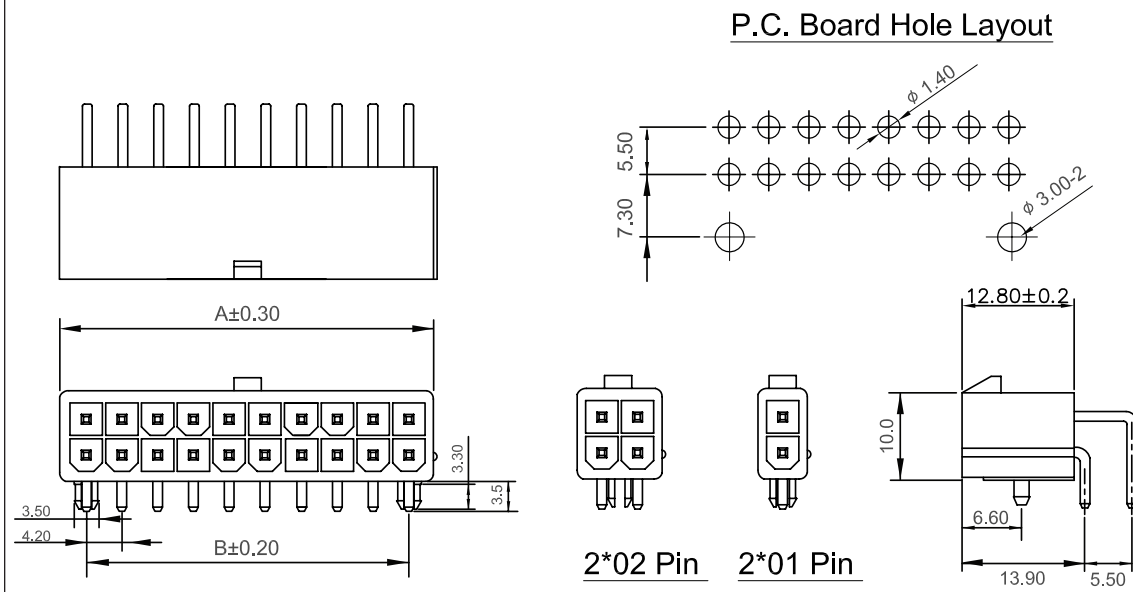

Specifications

Current Rating: 9A AC, DC
 Voltage Rating: 600V AC, DC
 Withstand Voltage: 1500V AC/min
 Insulation Resistance: 1000MΩ Min.
 Operating Temp.: -45°C ~ +105°C for UL94V-2
 -45°C ~ +125°C for UL94V-0
 Wafer: High Temp. Plastic Nylon 66 UL94V-2 (Transparent)
 High Temp. Plastic Nylon 66 UL94V-0 (Ivory)
 Pin: High Strength Brass with Tin Over Nickel Plated
 Color: Natural

Part Numbering System

MF420-RD - XX X T X

Series _____
 No. Of Pins: _____
 02~24
 Post Option: _____
 W = w/o Alignment Pin
 Nil = with Alignment Pin
 Contact Plating: _____
 T = Tin Plated
 Color Option: _____
 Nil = Transparent, UL94V-2 (Standard)
 V = Ivory, UL94V-0

Pins	Dimensions	
	A	B
02	5.60	-
04	9.80	4.20
06	14.00	8.40
08	18.20	12.60
10	22.40	16.80
12	26.60	21.00
14	30.80	25.20
16	35.00	29.40
18	39.20	33.60
20	43.40	37.80
22	47.60	42.00
24	51.80	46.20

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	