



MJ-2MM-35-B

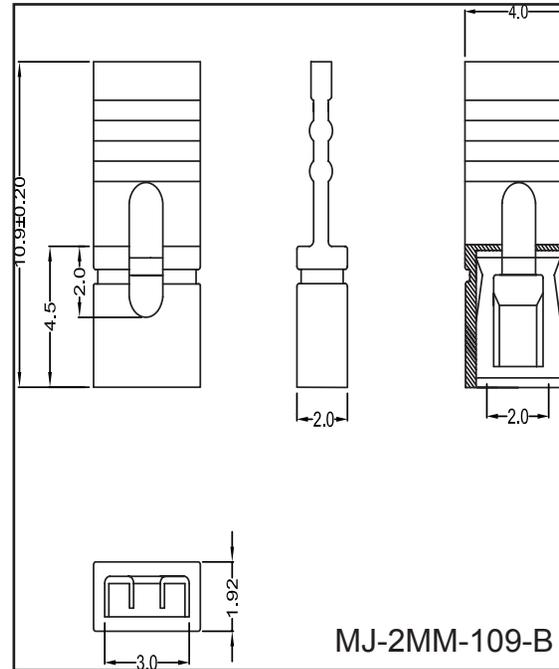

MJ-2MM-109-B

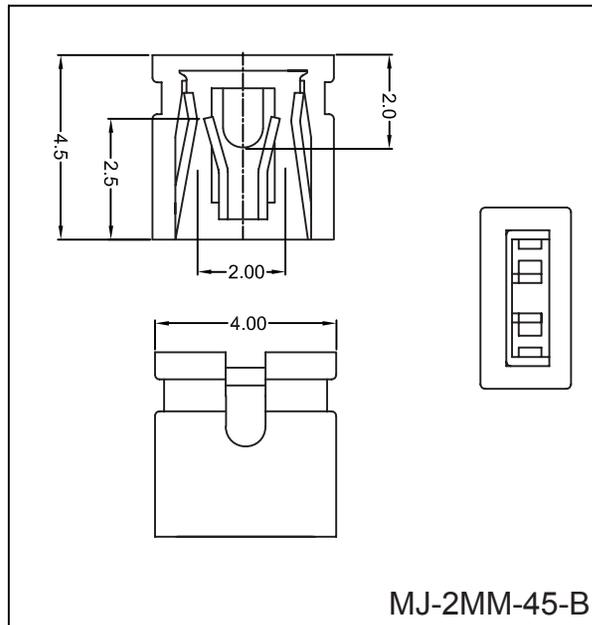

MJ-2MM-45-B

## Specifications

Current Rating: 3 Amp.  
 Dielectric Withstanding: 1000V AC min per minute  
 Insulator Resistance: 1000M ohms Min. at DC 500V  
 Contact Resistance: 25m ohms Max.  
 Operation Temperature: -55°C to +85°C  
 Insulator: PBT+ 20% Glass Fiber UL-94V-0  
 Contact: Phosphor Bronze  
 Contact Plating: Gold / Nickel Plated

## Part Numbering System

**MJ-2MM - XXX - B - G - XXX**

Series

Insulator Color:

Nil = Black  
 BLU = Blue  
 GRN = Green  
 PUR = Purple  
 RED = Red  
 WHT = White  
 YEL = Yellow

Insulator Height:

35 = 3.50mm  
 45 = 4.5mm  
 109 = 10.9mm

Insulator Type:

B = Open Type

Contact Plating:

G = Gold Flash

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	