

Specifications

Current Rating: 3 Amp.
 Dielectric Withstanding: 1000V AC min per minute
 Insulator Resistance: 1000M ohms Min. at DC 650V
 Contact Resistance: 25m ohms Max.
 Operation Temperature: -55°C to +85°C
 Insulator: PBT+ 30% Glass Fiber UL-94V-0
 Contact: Phosphor Bronze
 Contact Plating: Gold / Nickel Plated

Part Numbering System

MJ-2MM-J - XX - G


Series

Multi Option:

02 = 2 together
 03 = 3 together
 .
 .
 10 = 10 together

Contact Plating:

G = Gold Flash

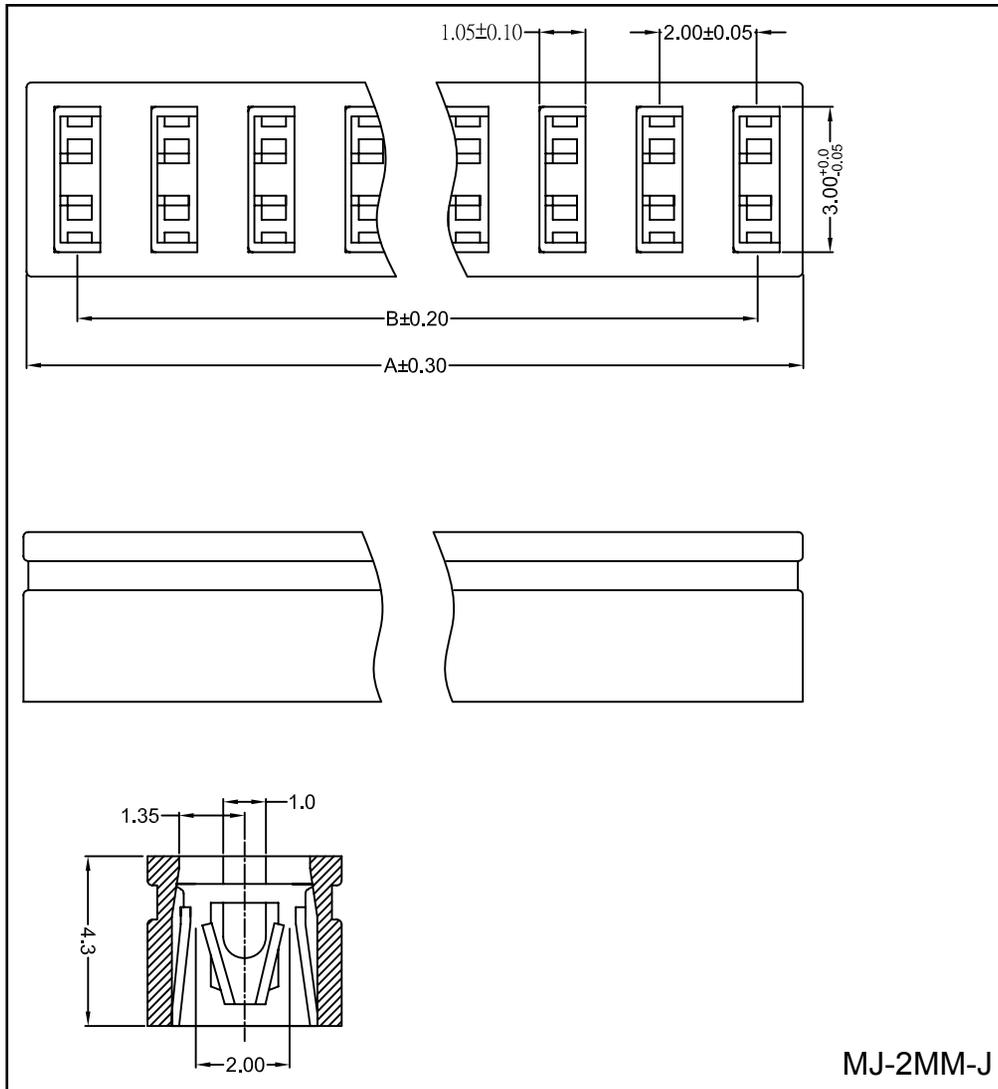

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	