

### Specifications

Current Rating: 3 Amp.  
Dielectric Strength: 500V AC  
Insulator Resistance: 1000M ohms Min.  
Contact Resistance: 20m ohms Max.  
Operation Temperature: -55°C to +85°C  
Insulator: PBT+ 25% Glass Fiber UL-94V-0  
Contact: Phosphor Bronze  
Contact Plating: Gold / Nickel Plated

### Part Numbering System


**MJ-JL63 - 10 - B - G**

Series

**Multi Option:**  
10 = 10 together

**Insulator Type:**  
B = Open Type

**Contact Plating:**  
G = Gold Flash

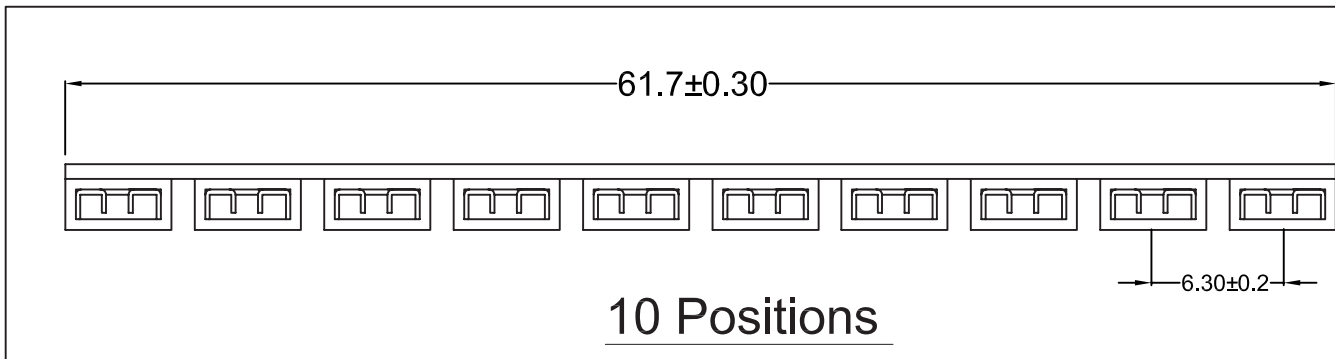

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	