

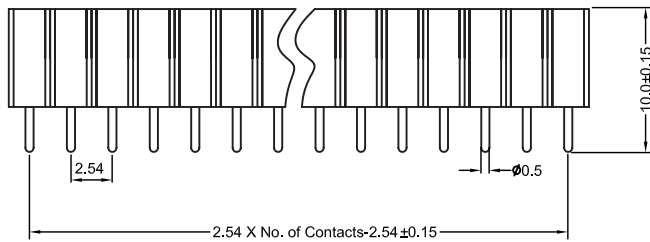


Recommended P.C. Board Hole Layout

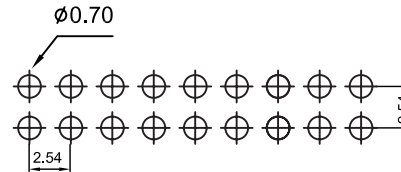


Specifications

Current Rating: 3A / Contact max.
Contact Resistance: $\leq 4\text{m}\Omega$ / Contact
Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V = 100\text{V}$
Operating Voltage: 60 VAC / DC

Pin (outer sleeve): Brass, machined CuZn38Pb2
Pin Plating: Tin Plated $200\mu\text{m}$
Gold Flash Plated
Insulator (black): Glass filled thermoplastic polyester, UL94V-0

Operating Temperature: Gold Plated: -55°C to $+125^\circ\text{C}$
Tin Plated: -40°C to $+105^\circ\text{C}$

Part Numbering System

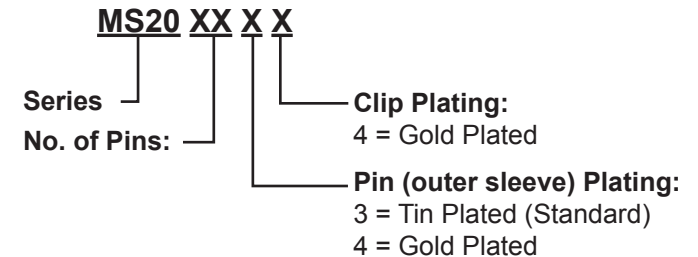

General Tolerance	
X. ± 0.50	X.° $\pm 5^\circ$
.X ± 0.20	.X° $\pm 2^\circ$
.XX ± 0.10	.XX° $\pm 1^\circ$
Units : mm	