






NBG635

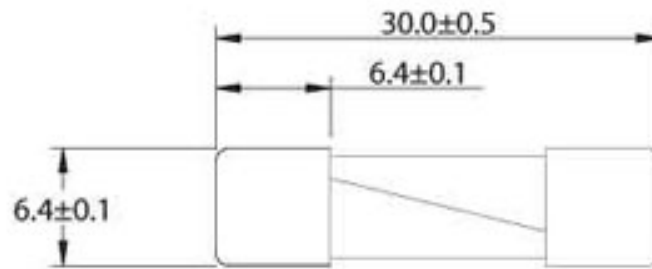


NBG635-P

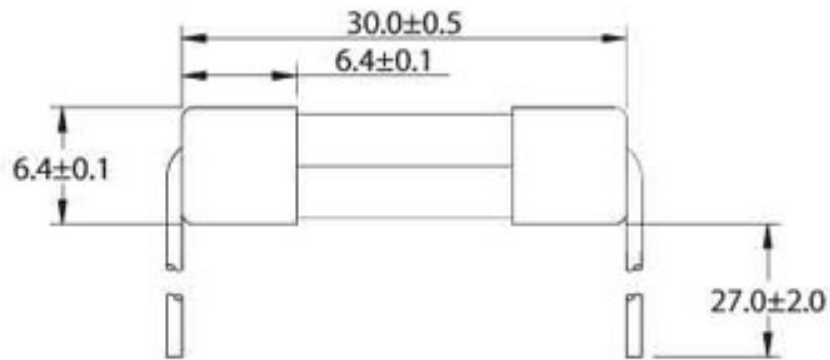

NBG635-PA

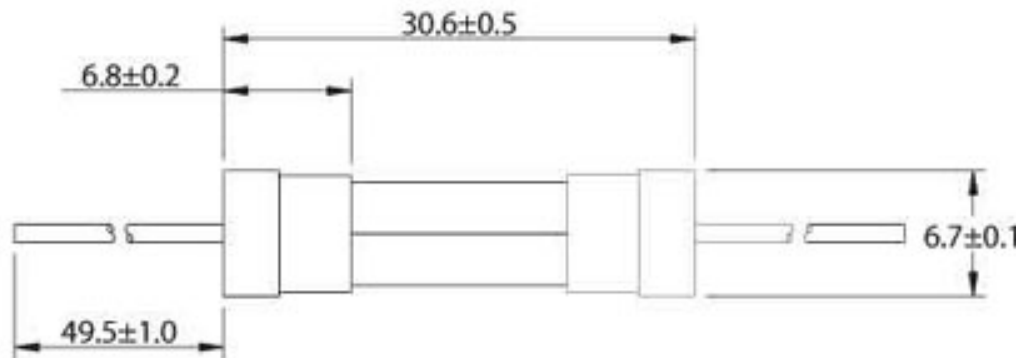

NBG635-PR

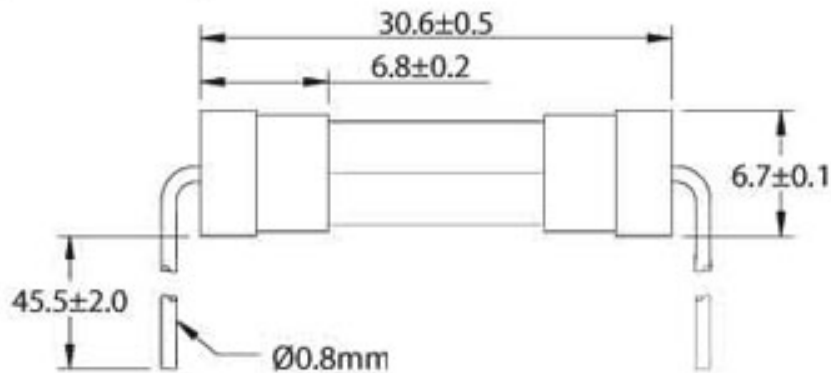

Constructiion:Glass Tube
 Rated current:0.05A-30A
 Rated Voltage:125V/250V
 Approvals:JIS C6575,15A and less

Electrical Characteristic

Rated Current	1.3 In	1.6 In	2 In
In	Min.	Max.	Max.
50mA-30A	4 h	3600 S	120 S



NBG635 Series
Normal Blow, Glass Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage		
NBG635-0.050-__	50mA	35A @ 250V/AC 10KA @ 125V/AC	125V/250V		
NBG635-0.060-__	60mA				
NBG635-0.063-__	1/16A				
NBG635-0.070-__	70mA				
NBG635-0.080-__	80mA				
NBG635-0.100-__	100Ma				
NBG635-0.125-__	125mA				
NBG635-0.160-__	160mA				
NBG635-0.200-__	200mA				
NBG635-0.250-__	250mA				
NBG635-0.300-__	300mA				
NBG635-0.315-__	315mA				
NBG635-0.400-__	400mA				
NBG635-0.500-__	500mA				
NBG635-0.600-__	600mA				
NBG635-0.630-__	630mA				
NBG635-0.700-__	700mA				
NBG635-0.800-__	800mA				
NBG635-001-__	1A				
NBG635-1.25-__	1.25A			100A @ 250V/AC 10KA @ 125V/AC	125V/250V
NBG635-1.50-__	1.5A				
NBG635-1.60-__	1.6A				
NBG635-002-__	2A				
NBG635-2.50-__	2.5A				
NBG635-003-__	3A				
NBG635-3.15-__	3.15A				
NBG635-3.50-__	3.5A	200A @ 250V/AC 10KA @ 125V/AC	125V/250V		
NBG635-004-__	4A				
NBG635-005-__	5A				
NBG635-006-__	6A				
NBG635-6.30-__	6.3A				
NBG635-007-__	7A				
NBG635-008-__	8A				
NBG635-010-__	10A				
NBG635-012-__	12A	1000A @ 32V/AC		32V	
NBG635-013-__	13A				
NBG635-015-__	15A				
NBG635-016-__	16A				
NBG635-020-__	20A				
NBG635-025-__	25A				
NBG635-030-__	30A				

Style Options: Nil = Axial w/o Leads
P = Radial Straight Leads
PA = Axial with Leads
PR = Radial Bent Leads
ex. NBG635-3.15-PR