

3.50mm Pitch






RoHS



		
Rated Voltage	300V	150V
Rated Current	8A	8A
Insulation Withstand Voltage	AC 1500V / Min	
Insulation Resistance	≥ 500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	

Units: mm

- ① Housing: PA66(V0)
- ② Pin: Brass, Tin Plated

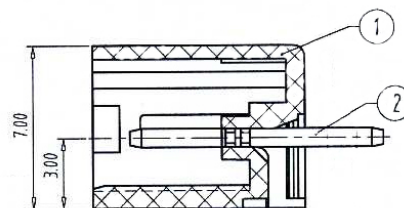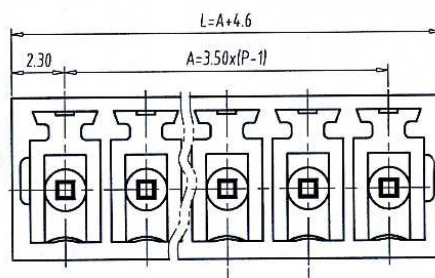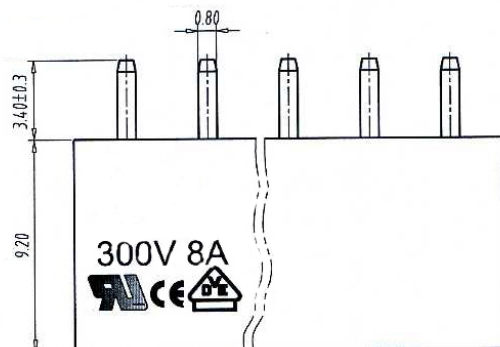

Part Numbering System:

PHC-350V - XXP - XXX

① ② ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green, BLK = Black, ORG = Orange

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	8.1	11.6	15.1	18.6	22.1	25.6	29.1	32.6	36.1	39.6	43.1	46.6
Dim A	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	50.1	53.6	57.1	60.6	64.1	67.6	71.1	74.6	78.1	81.6	85.1	
Dim A	45.5	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	