BLOCK Contact
TERMINAL BLOCKS

PHC-508V Series

5.08mm Pitch

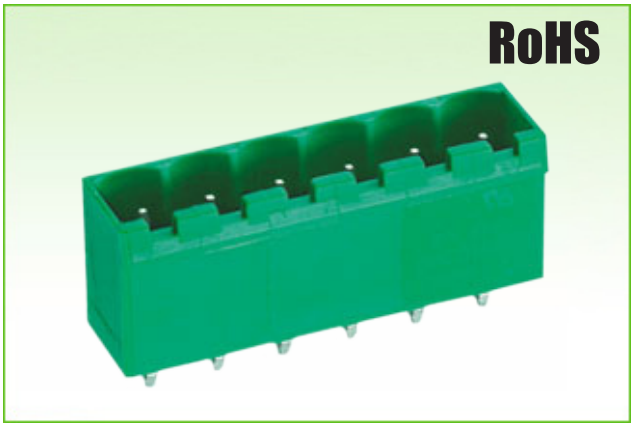

	c UL us	VDE CE
Rated Voltage	300V	250V
Rated Current	12A	
Insulation Withstand Voltage	AC 1500V / Min	
Insulation Resistance	≥ 500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	

Units: mm

① Housing: PA66(V0)
② Pin: Brass, Tin Plated

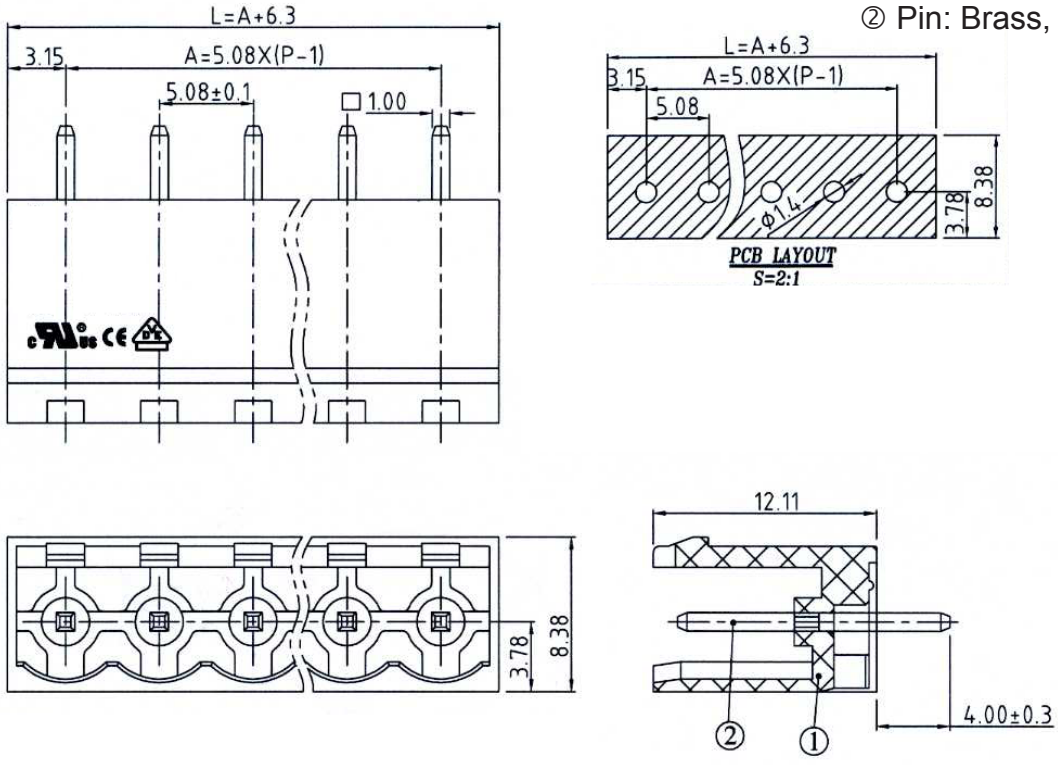

Part Numbering System:

PHC-508V - XXP - XXX
① ② ③

① **Series**
② **Number of Poles: 02, 03, 04, ..., 24**
③ **Insulator Color: GRN = Green, BLK = Black, ORG = Orange**

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	11.38	16.46	21.54	26.62	31.7	36.78	41.86	46.94	52.02	57.1	62.18	67.26
Dim A	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	72.34	77.42	82.5	87.58	92.66	97.74	102.82	107.9	112.98	118.06	123.14	
Dim A	66.04	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	