


TYPE:PPH

Are constructed with polypropylene film and metalized polypropylene film as dielectric, aluminum foil as electrode in series wound, copper-ply wire leads and epoxy resin coating, in non-inductive type.

FEATURES:

- Self-healing property.
- High corona starting voltage(csv).
- Low DF and inherent temperature rise.
- Two capacitors are wound in series connection. at the same time which will minimize the unbalance voltage distribution.
- Large current rating and high dv/dt.
- High reliability and excellent long term stability.
- Flame retardant epoxy resin coating.

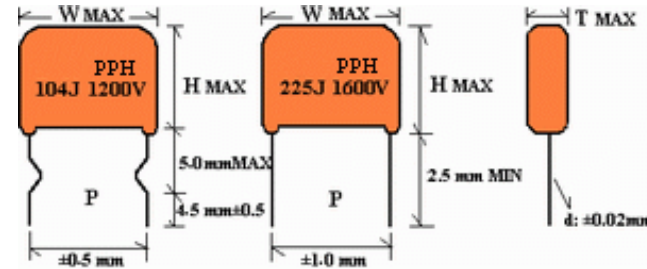

APPLICATIONS:

- Specially designed for horizontal resonance circuits of color TV
- Low loss and small inherent temperature rise
- Negative temperature coefficient of capacitance
- Flame retardant epoxy resin powder coating (UL94/V-0)

SPECIFICATION:

- | | |
|--------------------------|--|
| 1. Reference Standard | : GB/T 14579 (IEC60348-17) |
| 2. Climatic Category | : 40/085/21 |
| 3. Rated Voltage | : 800V (700Vo-p max)
1000/1200V (1000Vo-p max)
1600/2000V (1400Vo-p max) |
| 4. Capacitance Range | : 0.0010uF ~ 0.10uF |
| 5. Capacitance Tolerance | : ± 3.0% (H), ± 5%(J), ± 10%(K) |
| 6. Voltage Proof | : 1.75Ur(5s) |
| 7. Dissipation Factor | : ≤ 10x10 ⁻⁴ (1kHz, 20)
≤ 20x10 ⁻⁴ (10kHz, 20) |
| 7. Insulation Resistance | : ≥ 50000 Megohms (201min) |

DIMENSIONS:

lead dφ=0.8mm

0.024	19.5	15.5	10.5	15.0	5.5	6.1	7.7	10.5	12.0	14.0	29.5	18.5	10.5	25.0	6.8	7.8	9.1	12.1	13.3	14.9	29.5	20.5	12.0	25.0	9.2	10.5	12.3	16.3	17.9	20.0
0.027	19.5	17.0	10.5	15.0	5.8	6.4	8.0	10.9	12.4	14.6	29.5	19.0	11.0	25.0	7.4	8.3	9.6	12.7	13.8	15.4	31.5	20.5	12.0	27.0	9.9	11.2	12.9	17.1	18.5	20.7
0.033	23.5	16.0	9.5	19.0	6.5	7.0	8.8	12.0	13.5	15.7	29.5	20.5	12.0	25.0	8.2	9.3	10.6	13.8	14.9	16.5	31.5	21.5	13.0	27.0	11.0	12.5	14.3	18.6	20.1	22.2
0.036	23.5	16.5	9.5	19.0	7.1	7.9	9.7	13.1	14.6	16.8	29.5	20.5	12.5	25.0	9.1	10.3	11.8	15.2	16.2	17.6	31.5	22.0	13.5	27.0	12.2	13.9	15.9	20.5	21.8	23.7
0.039	23.5	16.5	10.0	19.0	7.9	8.9	10.6	14.4	15.9	18.0																				
0.047	23.5	17.5	11.0	19.0	8.8	10.0	11.7	15.6	17.2	19.3																				
0.056	23.5	18.5	11.5	19.0	9.2	10.5	12.3	16.3	17.9	20.0																				
0.068	26.5	19.0	11.0	22.0	9.9	11.2	12.9	17.1	18.5	20.7																				
0.082	26.5	20.0	12.0	22.0	11.0	12.5	14.3	18.6	20.1	22.2																				
0.10	26.5	21.5	13.0	22.0	12.2	13.9	15.9	20.5	21.8	23.7																				

Please contact us for special case or items not listed.