





3.50mm Pitch

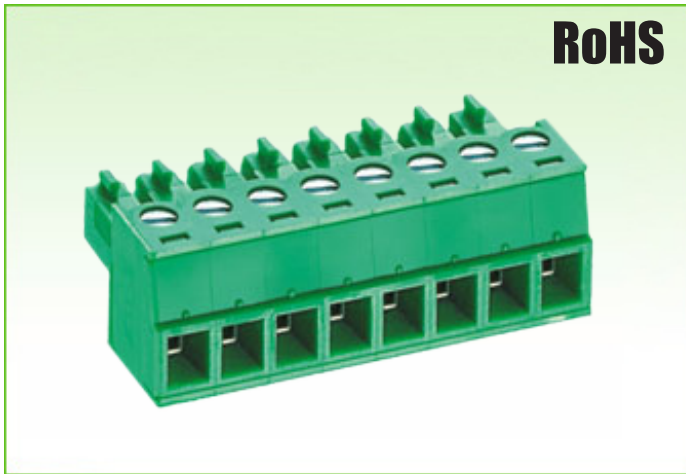

|                              |   |   |
|------------------------------|---|---|
|                              |  |  |
| Rated Voltage                | 300V  | 150V  |
| Rated Current                | 8A  | 10A   |
| Insulation Withstand Voltage | AC 2000V / Min  |   |
| Insulation Resistance        | ≥ 500MΩ or More at DC500V   |   |
| Temperature Range            | -40°C to +105°C   |   |
| Wire Range                   | 24-14 AWG   |   |
| Screw Torque                 | 0.2N.m  |   |

Units: mm

- ① Housing: PA66 (UL94-V0)
- ② Cover: PA66 (UL94-V0)
- ③ Block: Brass, Nickel Plated
- ④ Clamp: Bronze, Tin Plated
- ⑤ Screw: Steel, Zinc Plated

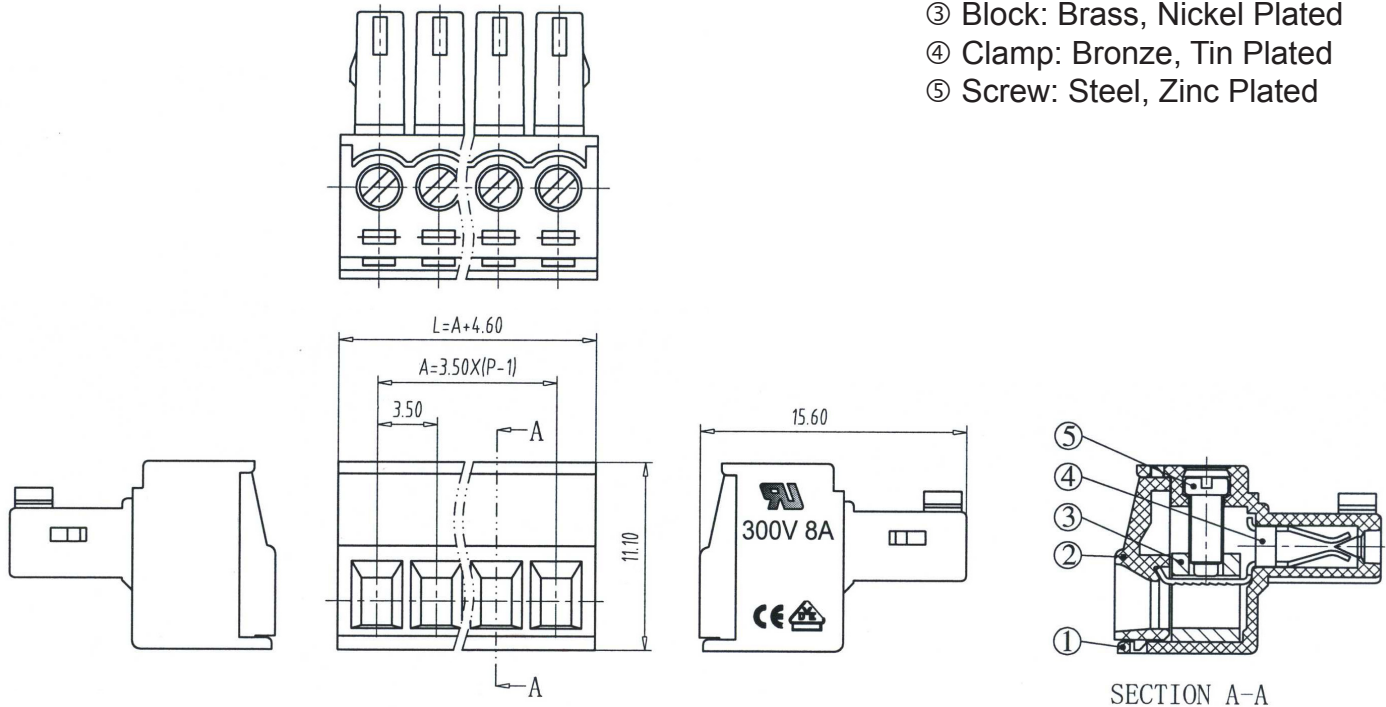

**Part Numbering System:**

PS-350V - XXP - XXX

①      ②      ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green, BLK = Black

|       |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| # Pin | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   |
| Dim L | 8.1  | 11.6 | 15.1 | 18.6 | 22.1 | 25.6 | 29.1 | 32.6 | 36.1 | 39.6 | 43.1 | 46.6 |
| Dim A | 3.5  | 7.0  | 10.5 | 14.0 | 17.5 | 21.0 | 24.5 | 28.0 | 31.5 | 35.0 | 38.5 | 42.0 |
| # Pin | 14   | 15   | 16   | 17   | 18   | 19   | 20   | 21   | 22   | 23   | 24   |      |
| Dim L | 50.1 | 53.6 | 57.1 | 60.6 | 64.1 | 67.6 | 71.1 | 74.6 | 78.1 | 81.6 | 85.1 |      |
| Dim A | 45.5 | 49.0 | 52.5 | 56.0 | 59.5 | 63.0 | 66.5 | 70.0 | 73.5 | 77.0 | 80.5 |      |