



5.08mm Pitch







	cULus
Rated Voltage	300V
Rated Current	12A
Insulation Withstand Voltage	AC 2000V / Min
Insulation Resistance	≥ 500MΩ or More at DC500V
Temperature Range	-40°C to +105°C
Wire Range	28-12 AWG
Wire Strip Length	5.8 - 6.1mm
Screw	M2.5
Screw Torque	3.5 lbf.in

Units: mm



- ① Housing: PA66(V0)
- ② Cover: PA66(V0)
- ③ Clamp: Bronze, Tin Plated
- ④ Block: Brass, Nickel Plated
- ⑤ Screw: Steel, Zinc Plated

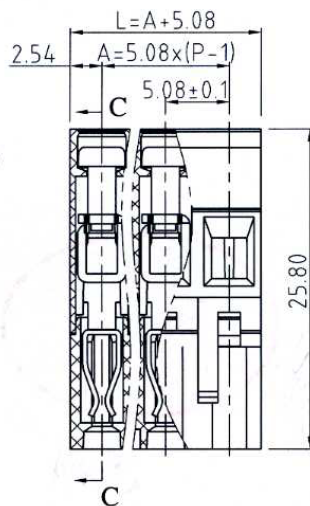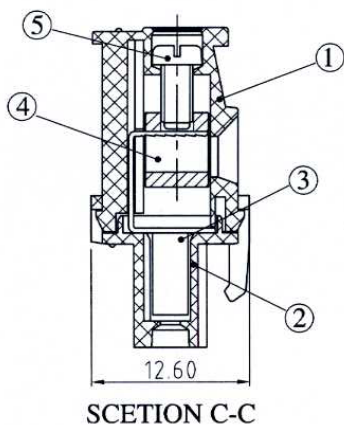

Part Numbering System:

PS-508R - XXP - XXX

① ② ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green, BLK = Black, ORG = Orange

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96	66.04
Dim A	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92	
Dim A	66.04	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	