




5.08mm Pitch

PS05-508V Series



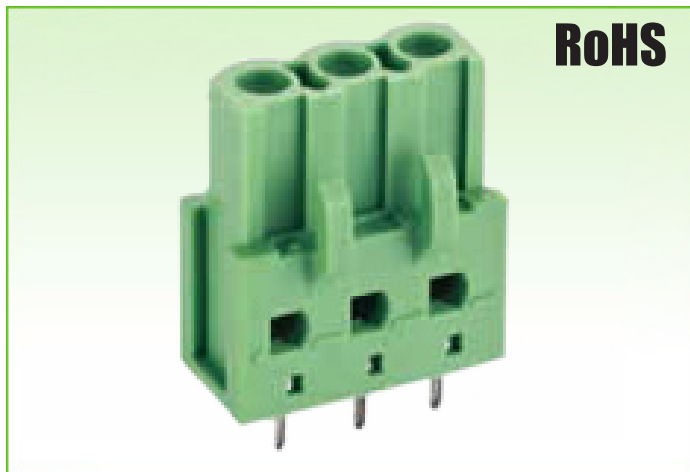


	cULus	IEC
Rated Voltage	300V	320V
Rated Current	16A	20A
Insulation Withstand Voltage	AC 2000V / Min	
Insulation Resistance	≥ 500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	

Units: mm

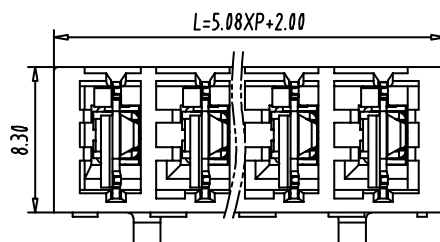

- ① Housing: PA66 (V0)
- ② Solder Pin: Bronze, Tin Plated

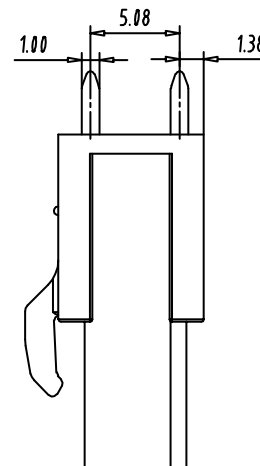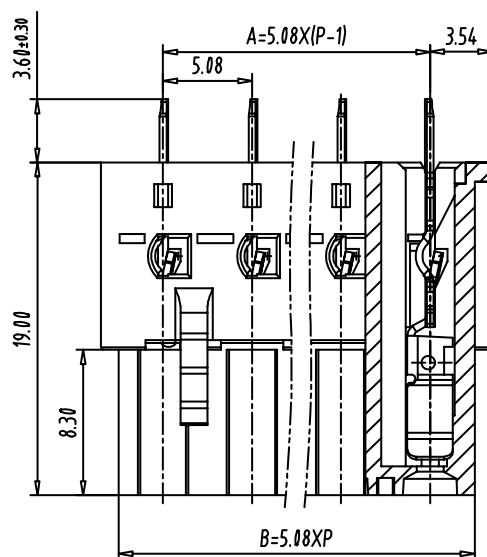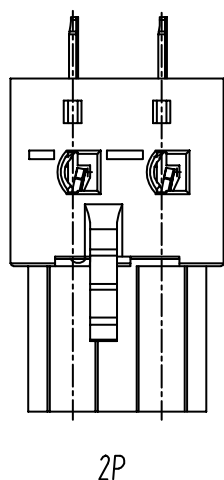

Part Numbering System:

PS05-508V - XXP - XXX

① ② ③

① Series

② Number of Poles: 02, 03, 04, ..., 24

③ Insulator Color: GRN = Green
BLK = Black

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	12.16	17.24	22.32	27.40	32.48	37.56	42.64	47.72	52.80	57.88	62.96	68.04
Dim A	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
Dim B	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	73.12	78.20	83.28	88.36	93.44	98.52	103.60	108.68	113.76	118.84	123.92	
Dim A	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
Dim B	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	