




5.08mm Pitch



		
Rated Voltage	300V	320V
Rated Current	16A	20A
Insulation Withstand Voltage	AC 2200V / Min.	
Insulation Resistance	500MΩ or More at DC500V	
Temperature Range	-40°C to +105°C	
Wire Clamp Screw Torque	M3, 0.7Nm Max	
Mounting Screw Torque	M2.5, 0.25Nm Max	
Wire Stripping Length	7.0mm	
Wire Range	30-12AWG	0.2~2.5mm <sup>2</sup>

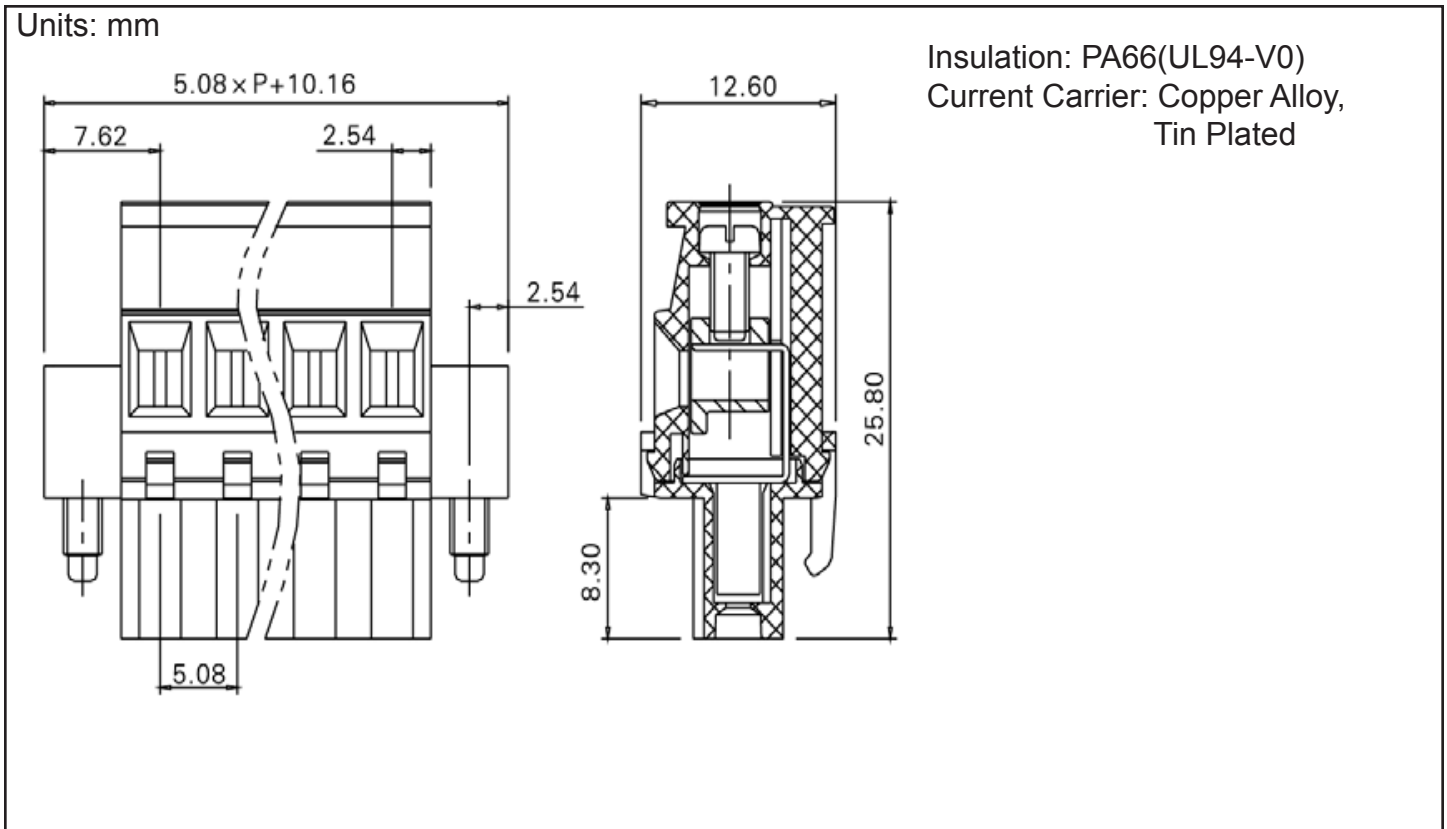

**Part Numbering System:**

**PSW-508RL - XXP - XXX**

①                      ②                      ③

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 24
- ③ Insulator Color: GRN = Green