


DIMENSIONS

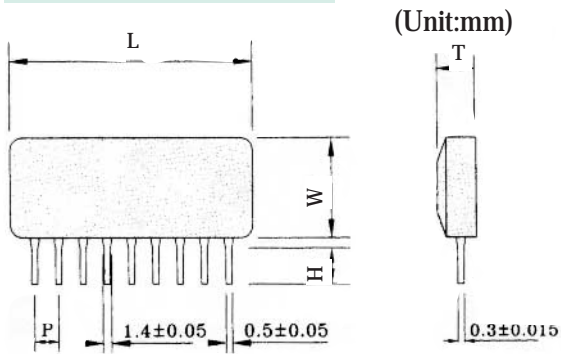

| Code | Size (mm) |
|------|--|
| W | 6.5 ± 0.2 |
| P | 2.54 ± 0.05 |
| T | 3.50 max |
| L | $2.54 \times \text{Pin No.} + 1.3$ (max) |
| H | 3.5 ± 0.5 |

APPLICATIONS

- TTL, CMOS, NMOS, PMOS Interface Circuits
- Personal Computer
- Computer Peripheral Products
- OA Machines
- Communication Products
- Home Appliance


CIRCUIT CONFIGURATIONS

| Type | Circuit-A | Circuit-B | Circuit-C |
|---------|------------------|------------------|------------------|
| Circuit | | | |
| | No. of Cells 4-8 | No. of Cells 4-8 | No. of Cells 4-8 |
| Type | Circuit-D | Circuit-E | Circuit-F |
| Circuit | | | |
| | No. of Cells 4-8 | No. of Cells 4-8 | No. of Cells 4-8 |

SPECIFICATIONS

| | Resistor | Capacitor |
|-------------------------|----------------|---------------------|
| Rated Power | .125W/Resistor | |
| Max. Operating Voltage | 100V | DC25~100V |
| Range | 10 ~1M | 10PF~0.1μF |
| Tolerance | ±1%, ±2%, ±5% | ±5%~+80/-20% |
| Temperature Coefficient | ±200ppm/°C | ±30~+350/-100ppm/°C |
| Operating Temp. Range | -55°C~125°C | |

Part Numbering System

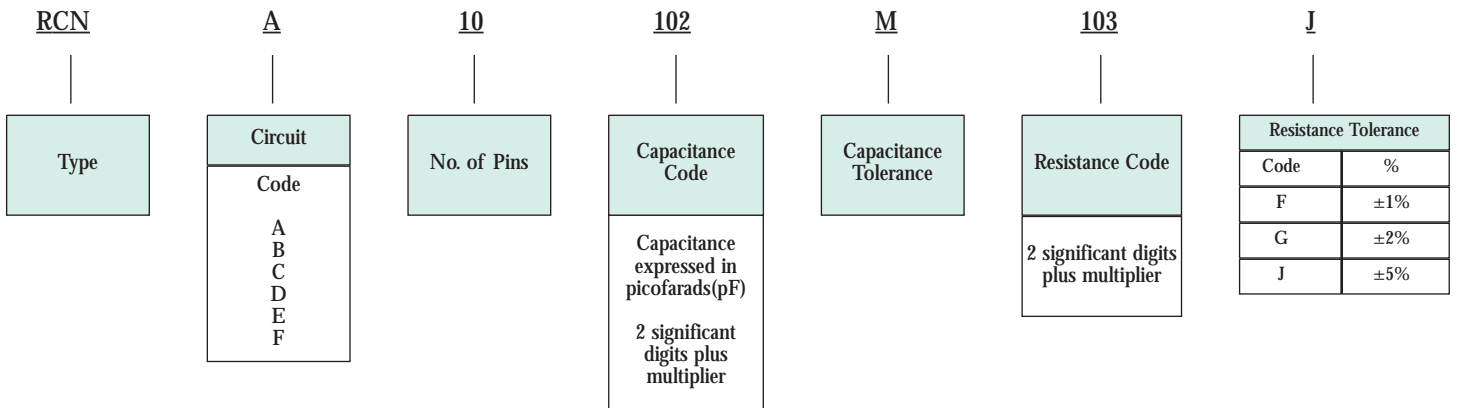

Marking

