




## RG174U

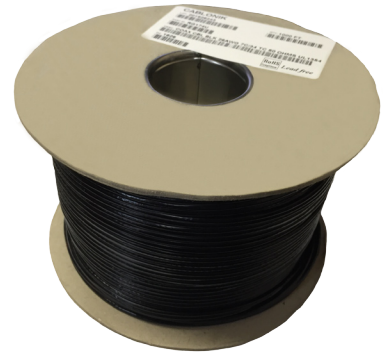

### Product Specifications:

- \* Coaxial Cable Type
- \* Temperature Range: 40°C + 75°C
- \* Packaging: 1000' / Reel

Number of Conductor	1
Conductor Size	26 AWG
Conductor Stranding	7 x 34
Conductor Material	0.019" Bare Copper-Covered Steel
Insulator Material	Polyethylene
Insulator Material Diameter	0.060"
Outer Shield Material	Tinned Copper Braid Shield (90%)
Outer Jacket Material	PVC - Black
Overall Nominal Diameter	0.110"
Put-Up Feet	1000
Weight	7 lbs
Colour	Black
Category	Indoor
AMW Specification	UL 1354
Nominal Impedance	50 Ω
Nominal Velocity of Propagation	66 %
Nominal Capacitance Conductor to Shield	30.8 pF / ft