



RXW Series

Features

- 105°C, 4,000 ~ 7,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS Compliance




Sleeve & Marking Color: Black & Golden

Specifications


Items	Performance																																												
Category Temperature Range	6.3 ~ 63V -55°C ~ +105°C				100V -40°C ~ +105°C																																								
Capacitance Tolerance	± 20 % (at 120Hz, 20°C)																																												
Leakage Current (at 20°C)	I = 0.01CV or 3 (μ A) whichever is greater (after 2 minutes) Where, C = rated capacitance in μ F V = rated DC working voltage in V																																												
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table> <p>When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.</p>									Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																					
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																					
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-55°C/-40°C) / Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>									Rated Voltage	6.3	10	16	25	35	50	63	100	Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																					
Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																																					
Endurance	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm</td> </tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td> </tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 7,000 hours at 105°C.</p>									Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm																																												
Capacitance Change	Within ±25% of initial value																																												
Tanδ	Less than 200% of specified value																																												
Leakage Current	Within specified value																																												
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td> </tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>									Test Time	1,000 Hrs								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	1,000 Hrs																																												
Capacitance Change	Within ±25% of initial value																																												
Tanδ	Less than 200% of specified value																																												
Leakage Current	Within specified value																																												
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td>Freq.(Hz)</td> <td>120</td> <td>1k</td> <td>10k</td> <td>100k up</td> </tr> <tr> <td>Cap.(μF)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>under ~ 33</td> <td>0.42</td> <td>0.70</td> <td>0.90</td> <td>1.0</td> </tr> <tr> <td>39 ~ 270</td> <td>0.5</td> <td>0.73</td> <td>0.92</td> <td>1.0</td> </tr> <tr> <td>330 ~ 680</td> <td>0.55</td> <td>0.77</td> <td>0.94</td> <td>1.0</td> </tr> <tr> <td>820 ~ 1,800</td> <td>0.6</td> <td>0.80</td> <td>0.96</td> <td>1.0</td> </tr> <tr> <td>2,200 ~ 15,000</td> <td>0.7</td> <td>0.85</td> <td>0.98</td> <td>1.0</td> </tr> </table>									Freq.(Hz)	120	1k	10k	100k up	Cap.(μ F)					under ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.5	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 15,000	0.7	0.85	0.98	1.0	
Freq.(Hz)	120	1k	10k	100k up																																									
Cap.(μ F)																																													
under ~ 33	0.42	0.70	0.90	1.0																																									
39 ~ 270	0.5	0.73	0.92	1.0																																									
330 ~ 680	0.55	0.77	0.94	1.0																																									
820 ~ 1,800	0.6	0.80	0.96	1.0																																									
2,200 ~ 15,000	0.7	0.85	0.98	1.0																																									

Diagram of Dimensions

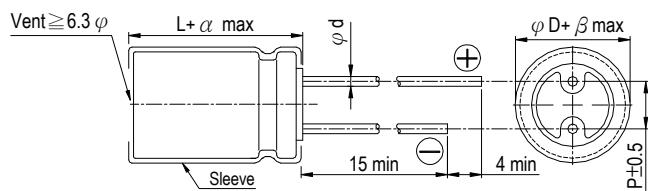

Lead Spacing and Diameter Unit: mm						
ϕD	5	6.3	8	10	12.5	16
P	2.0	2.5	3.5	5.0	5.0	7.5
ϕd	0.5		0.6		0.8	
α	L<20: 1.5, L≥20: 2.0					
β	0.5					

The case size of 16×20, 18×20 and 18×25 are suitable for below diagram:

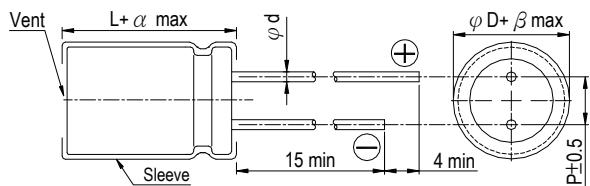

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & permissible Ripple Current

V. DC μF	$\phi D \times L$	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)					
		Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)			
		20°C	-10°C	100k Hz	20°C	-10°C	100k Hz	20°C	-10°C	100k Hz	20°C	-10°C	100k Hz			
4.7											5×11	0.6	1.2	180		
10								5×11	0.6	1.2	180	5×11	0.6	1.2	180	
22	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180
33	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180
39											5×11	0.6	1.2	180		
47	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180	5×11	0.6	1.2	180
56								5×11	0.6	1.2	180					
82					5×11	0.6	1.2	180				6.3×11	0.25	0.50	290	
100	5×11	0.6	1.2	180	5×11	0.6	1.2	180	6.3×11	0.25	0.5	290	6.3×11	0.25	0.50	290
120								6.3×11	0.25	0.5	290	6.3×15	0.23	0.46	430	
150	6.3×11	0.25	0.5	290	6.3×11	0.25	0.5	290	6.3×11	0.25	0.5	290	8×11.5	0.117	0.234	555
180					6.3×11	0.25	0.5	290	6.3×15	0.23	0.46	430				
220	6.3×11	0.25	0.5	290	6.3×11	0.25	0.5	290	8×11.5	0.117	0.234	555	8×11.5	0.117	0.234	555
330	6.3×11	0.25	0.50	290	8×11.5	0.117	0.234	555	8×11.5	0.117	0.234	555	8×15	0.085	0.17	730
	6.3×15	0.23	0.46	430								10×12.5	0.090	0.18	755	
470	8×11.5	0.117	0.234	555	8×11.5	0.117	0.234	555	8×15	0.085	0.17	730	8×20	0.065	0.130	995
									10×12.5	0.090	0.18	755	10×16	0.068	0.136	1,050
560	8×11.5	0.117	0.234	555								10×20	0.052	0.104	1,220	
680	10×12.5	0.090	0.180	755	8×15	0.085	0.170	730	8×20	0.065	0.130	995	10×20	0.052	0.104	1,220
820	8×15	0.085	0.170	730	10×12.5	0.090	0.180	755	10×20	0.052	0.104	1,220	10×25	0.045	0.090	1,440
1,000	10×12.5	0.090	0.180	755	8×20	0.065	0.130	995	10×20	0.052	0.104	1,220	10×30	0.035	0.070	1,815
	8×20	0.065	0.130	955	10×16	0.068	0.136	1,050	10×20	0.052	0.104	1,220	12.5×20	0.038	0.076	1,655
1,200	10×16	0.068	0.136	955	10×20	0.052	0.104	1,220	10×25	0.045	0.090	1,440				
1,500	10×20	0.052	0.104	1,220	10×20	0.052	0.104	1,220	12.5×20	0.038	0.076	1,655	12.5×25	0.030	0.060	1,945
					10×25	0.045	0.090	1,440	10×30	0.035	0.070	1,815	16×25	0.022	0.044	2,555
1,800												12.5×30	0.025	0.050	2,310	
												16×20	0.029	0.058	2,205	
2,200	10×25	0.045	0.090	1,440	10×30	0.035	0.070	1,815	12.5×25	0.030	0.06	1,945	12.5×35	0.022	0.044	2,510
	12.5×20	0.038	0.076	1,815	12.5×20	0.038	0.076	1,655				16×25	0.022	0.044	2,555	
2,700	10×30	0.035	0.070	1,815	12.5×25	0.030	0.060	1,945	12.5×30	0.025	0.05	2,310	16×25	0.022	0.044	2,555
3,300	12.5×20	0.038	0.076	1,655	12.5×25	0.030	0.060	1,945	16×25	0.022	0.044	2,555	16×31.5	0.018	0.036	3,010
				12.5×30	0.025	0.050	2,310	12.5×35	0.022	0.044	2,510	18×25	0.020	0.040	2,740	
3,900	12.5×25	0.030	0.060	1,945	12.5×35	0.022	0.044	2,510	16×25	0.022	0.044	2,555	16×35.5	0.016	0.032	3,150
				16×20	0.029	0.058	2,205	18×20	0.028	0.056	2,490	18×31.5	0.016	0.032	3,635	
4,700	12.5×30	0.025	0.050	2,310	16×25	0.022	0.044	2,555	16×31.5	0.018	0.036	3,010	18×35.5	0.015	0.030	3,680
	16×25	0.022	0.044	2,510	16×25	0.022	0.044	2,555	16×35.5	0.016	0.032	3,150				
5,600	12.5×35	0.022	0.044	2,510	18×20	0.028	0.056	2,490	18×31.5	0.016	0.032	3,635				
	16×20	0.029	0.058	2,205												
6,800	16×25	0.022	0.044	2,555	16×31.5	0.018	0.036	3,010	18×35.5	0.015	0.030	3,680	18×40	0.014	0.028	3,800
	18×20	0.028	0.056	2,490	18×25	0.020	0.040	2,740								
8,200	16×31.5	0.018	0.036	3,010	16×35.5	0.016	0.032	3,150	18×35.5	0.015	0.030	3,680				
	18×31.5	0.016	0.032	3,150	18×35.5	0.016	0.032	3,635								
10,000	16×31.5	0.016	0.032	3,150	18×35.5	0.015	0.030	3,680	18×40	0.014	0.028	3,800				
12,000	18×31.5	0.016	0.032	3,635												
15,000	18×35.5	0.015	0.030	3,680	18×40	0.014	0.028	3,800								

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & Permissible Ripple Current

V. DC μF	$\phi D \times L$	35V (1V)			50V (1H)			63V (1J)			100V (2A)					
		Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, Max/100kHz)		Ripple Current (mA/rms, 105°C)
		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz
2.2													5×11	9.8	19.6	44
3.3													5×11	6.6	13.2	58
4.7	5×11	0.6	1.2	180	5×11	2.3	4.6	90	5×11	4.7	9.4	68	5×11	4.6	9.2	74
6.8									5×11	2.5	5.0	95	5×11	3.5	7.0	95
10	5×11	0.6	1.2	180	5×11	1.4	2.8	120	5×11	2.1	4.2	110	6.3×11	1.8	3.6	130
12									5×11	2.0	4.0	145				
15									6.3×11	1.2	2.4	160	8×11.5	0.83	1.66	180
18					5×11	1.3	2.6	155					6.3×15	0.80	1.60	200
22	5×11	0.6	1.2	180	5×11	1.2	2.4	170	6.3×11	0.71	1.42	250	8×11.5	0.68	1.36	230
27	5×11	0.6	1.2	180												
33	5×11	0.6	1.2	180	6.3×11	0.43	0.86	300	6.3×11	0.71	1.42	250	8×15 10×12.5	0.45 0.46	0.90 0.92	360 320
39									6.3×15	0.70	1.40	330				
47	6.3×11	0.25	0.5	290	6.3×11	0.43	0.86	300	8×11.5	0.342	0.684	405	10×16 8×20	0.37 0.37	0.74 0.74	420 420
56	6.3×11	0.25	0.5	290	6.3×15	0.40	0.80	360								
68									8×11.5	0.342	0.684	405	10×20	0.30	0.60	490
82	6.3×15	0.23	0.46	430	8×11.5	0.234	0.468	485					10×25	0.25	0.50	540
100	8×11.5	0.117	0.234	555	8×11.5	0.234	0.468	485	10×12.5 8×15	0.256 0.230	0.512 0.460	535 535	12.5×20	0.18	0.36	580
120					8×15 10×12.5	0.155 0.162	0.310 0.324	635 615	10×16	0.194	0.388	600				
150	8×11.5	0.117	0.234	555	10×12.5	0.162	0.324	615	10×16	0.194	0.388	660	12.5×25	0.13	0.26	710
180					8×20 10×16	0.120 0.119	0.240 0.238	860 850	10×20 12.5×16	0.147 0.150	0.294 0.300	885 1,020	12.5×30 16×20	0.12 0.13	0.24 0.26	790 750
220	8×15 10×12.5	0.085 0.090	0.17 0.18	730 755	10×16 10×20	0.119 0.090	0.238 0.180	850 1,030	10×20 10×25	0.147 0.130	0.294 0.260	885 1,050	16×25 18×20	0.10 0.11	0.20 0.22	890 850
270					10×25	0.082	0.164	1,200	16×16	0.090	0.180	1,410				
330	8×20 10×16	0.065 0.068	0.130 0.136	995 1,050	10×20 10×30	0.090 0.060	0.180 0.120	1,030 1,610	12.5×20	0.085	0.170	1,285	16×25	0.090	0.180	1,080
390	10×20	0.052	0.104	1,220	12.5×20	0.063	0.126	1,480	12.5×25 18×16	0.070 0.086	0.140 0.172	1,720 1,690	18×25	0.083	0.166	1,260
470	10×20	0.052	0.104	1,220	12.5×20	0.060	0.120	1,500	12.5×25 12.5×30 16×20	0.070 0.055 0.059	0.140 0.110 0.118	1,720 2,090 1,765	16×31.5	0.076	0.152	1,310
560	10×25	0.045	0.090	1,440	12.5×25	0.050	0.100	1,832	16×25	0.050	0.100	2,160	18×31.5 18×35.5	0.068 0.064	0.136 0.128	1,370 1,410
680	10×30 12.5×20	0.035 0.038	0.070 0.076	1,815 1,655	12.5×25 16×20	0.050 0.048	0.100 0.096	1,832 1,835	12.5×35 18×20	0.047 0.055	0.094 0.110	2,265 2,290				
820					12.5×35 18×20	0.034 0.042	0.068 0.084	2,285 2,200	16×31.5 18×25	0.043 0.043	0.086 0.086	2,670 2,585	18×40	0.047	0.094	1,520
1,000	12.5×25	0.030	0.060	1,945	16×25	0.034	0.068	2,235	16×31.5 16×35.5	0.043 0.036	0.086 0.072	2,670 2,770				
1,200	12.5×30 16×20	0.025 0.029	0.050 0.058	2,310 2,205	16×31.5 18×25	0.028 0.029	0.056 0.058	2,700 2,610	18×31.5	0.032	0.064	2,950				
1,500	12.5×35 16×25	0.022	0.044	2,510 2,555	16×31.5 16×35.5	0.028 0.025	0.056 0.050	2,700 2,790	18×35.5	0.030	0.060	3,095				
1,800	16×25	0.022	0.044	2,555 2,490	18×31.5	0.025	0.05	3,000								
2,200	16×31.5 18×25	0.018 0.020	0.036 0.040	3,010 2,740	18×35.5	0.023	0.046	3,100	18×40	0.028	0.056	3,200				
2,700	16×35.5	0.016	0.032	3,150												
3,300	18×35.5	0.015	0.030	3,680												
4,700	18×40	0.014	0.028	3,800												

Part Numbering System

_RXW series	470μF	±20%	6.3V	Bulk Package	Gas Type	8φ×11.5L	Pb-free and PET coating case
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.