


### Specifications

- Current Rating: 2 Amp
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 500V
- Operating Temperature : -40°C ~ +105°C
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Material: Brass
- Contact Plating: See Option / Standard: Full Gold

### Part Numbering System

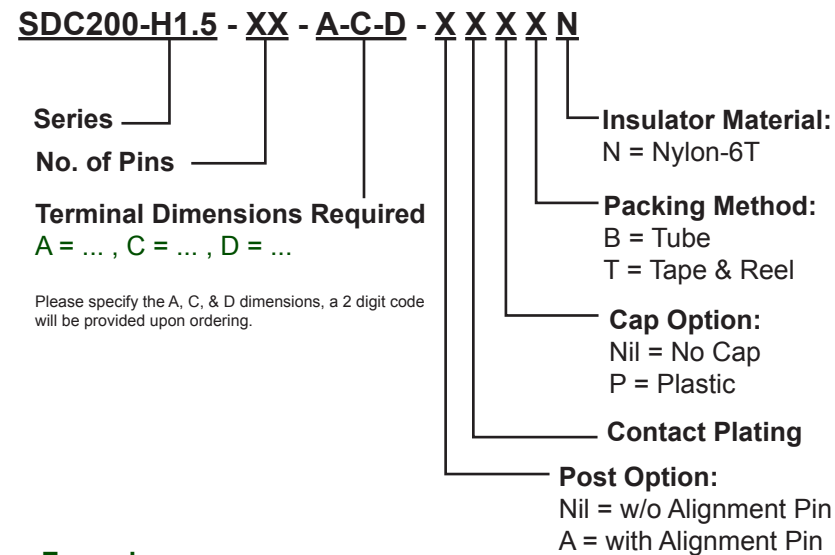

**Example:**  
SDC200-H1.5-12-1.27-6.00-5.00-GBN  
with 12pins, A: 1.27, C: 6.00, D: 5.00

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating	General Tolerance	
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"	X. ± 0.50	X.° ± 5°
				.X ± 0.20	.X° ± 2°
				.XX ± 0.10	.XX° ± 1°
				Units : mm	