



### SPECIFICATION

- Contact Rating: 0.3A, 4V DC
- Circuit: 1P2T
- Contact Resistance: 70mΩ max.
- Insulation Resistance: 100MΩ min. 100V DC
- Dielectric Strength: 100V AC / 1 minute
- Operating Force: 150 ± 100gf
- Travel: 1.5mm
- Operating Life: 10,000 cycles
- Operating Temperature: -20°C to +70°C
- Storage Temperature: -40°C to +85°C


### MATERIALS:

- Cover: Phosphor Bronze, Silver Plated
- Knob: Polyamide, PA6T
- Clip: Phosphor Bronze, Silver Plated
- Spring Plate: Stainless Steel
- Case: LCP
- Terminal: Phosphor Bronze, Silver Plated

### PACKAGING:

Part Number	Number Per Reel
SMSR6726M-150H140-1P2T	3000

### Dimensions: (Units: mm)

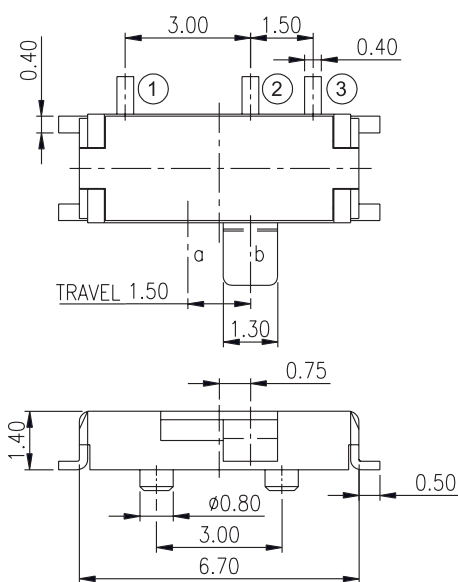

### Circuit Diagram

