

Style:

Rotary Switch mainly used as signal switch of electric devices with the general requirements of mechanical and electrical characteristics.

Operating Temperature: -25C ~ +80C

Storage Temperature: -40C ~ +85C

Current Range:


Non-Switching: 100mA, 50V DC

Switching: 25mA, 24V DC

Type of Actuation: Rotation


NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS , BRACKETED DIMENSION ARE IN INCHS.
2. GENERAL TOLERANCE: ± 0.2 mm




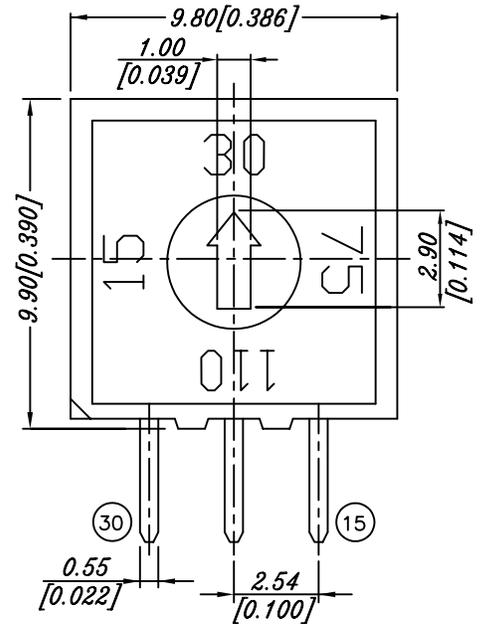


POSITION	CODE			
	15	30	75	110
15	○	●	●	●
30	●	○	●	●
75	●	●	○	●
110	●	●	●	○


CIRCUIT CHART

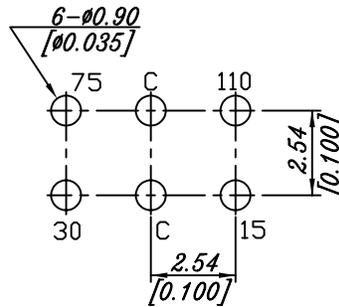

P. C. B. LAYOUT

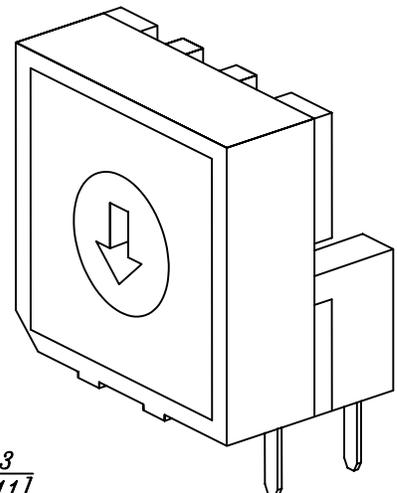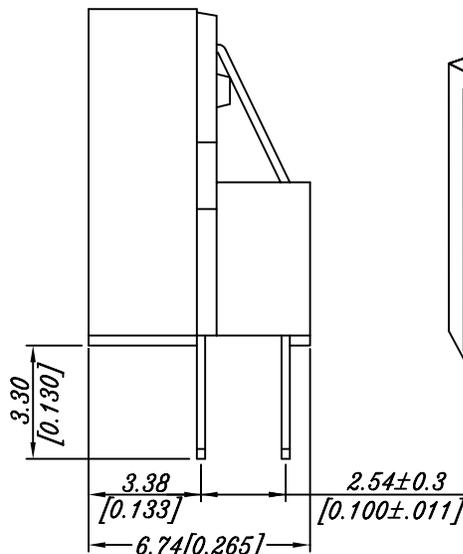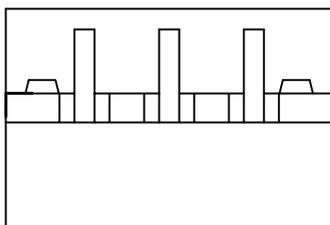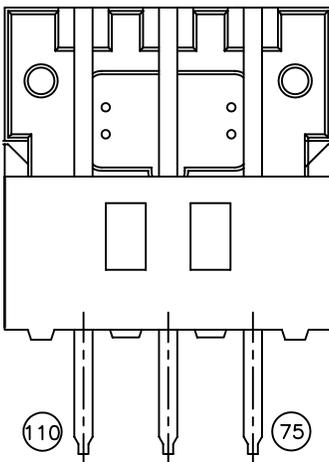

HOW TO ORDER:

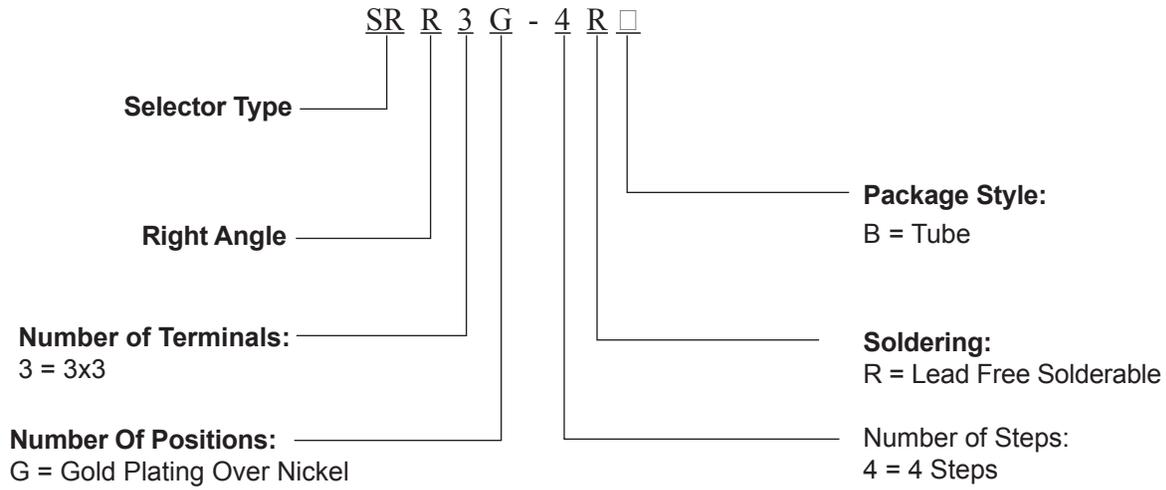

SOLDERING CONDITIONS:

Manual Soldering

Soldering Temperature	Max. 350°C
Continuous Soldering Time	Max. 5 seconds

Precautions in Handling

1. Care should be exercised so that flux from the upper part of the printed circuit board does not adhere to the switch.
2. Please make sure that there is no flux rose over the surface of the PCB.