



# ULTRA FAST GLASS PASSIVATED RECTIFIER

## UF2001G THRU UF2007G

VOLTAGE RANGE  
CURRENT


50 to 1000 Volts  
2.0 Ampere

### FEATURES

- Fast switching speed for high efficiency
- Glass passivated chip junction
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:  
260 /10 seconds, 0.375" (9.5mm) lead length

### MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.014 ounce, 0.39 gram

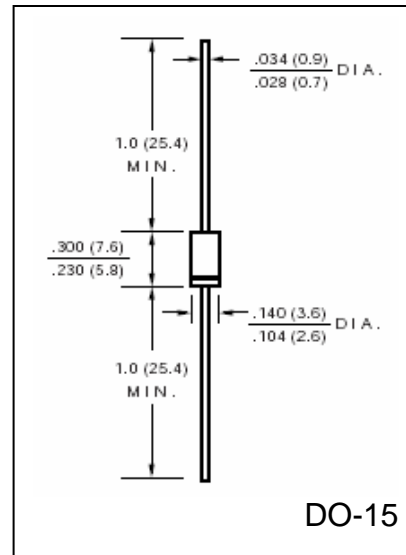

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	UF 2001G	UF 2002G	UF 2003G	UF 2004G	UF 2005G	UF 2006G	UF 2007G	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_L = 75^\circ C$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	60							Amps
Maximum Instantaneous Forward Voltage @ 2.0A	$V_F$	1.0							Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$	$I_R$	10							$\mu A$
DC Blocking Voltage per element $T_A = 125^\circ C$		50							
Maximum Reverse Recovery Time Test conditions $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$	$t_{rr}$	50				75			nS
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	$C_J$	15							pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	45							$^\circ C/W$
Operating Junction Temperature Range	$T_J$	(-65 to +150)							$^\circ C$
Storage Temperature Range	$T_{STG}$	(-65 to +150)							$^\circ C$

### Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted



# RATINGS AND CHARACTERISTIC CURVES UF201G THRU UF207G

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVES

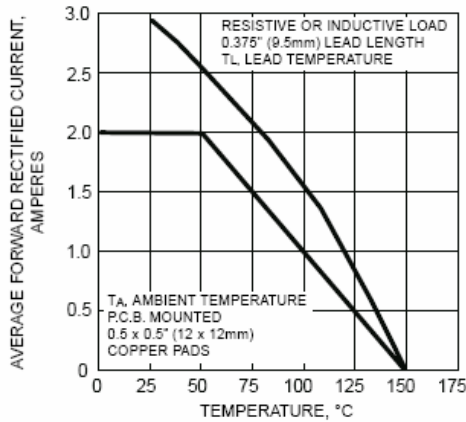


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

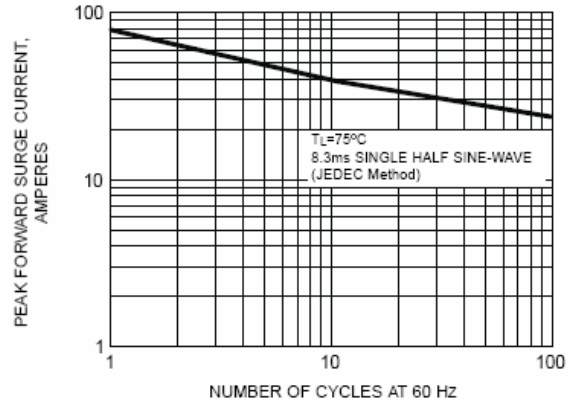


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

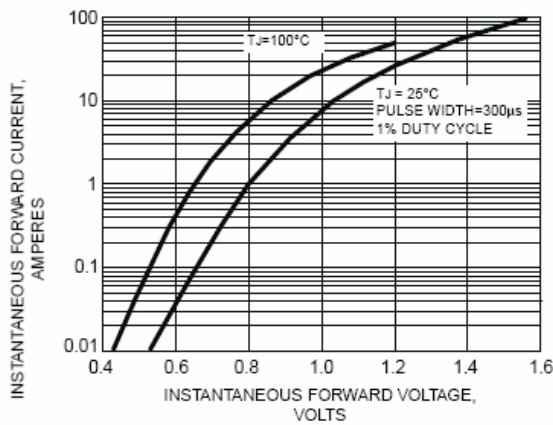


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

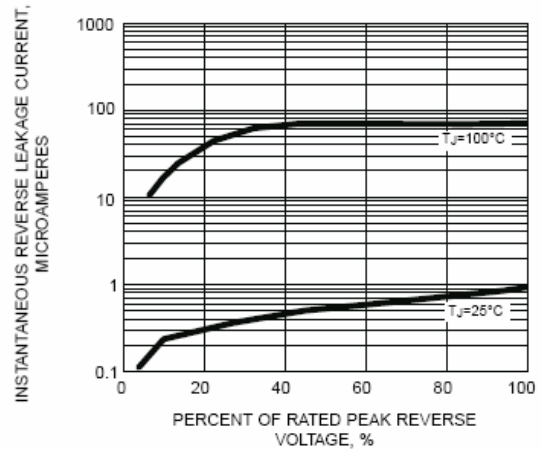


FIG. 5 - REVERSE SWITCHING CHARACTERISTICS

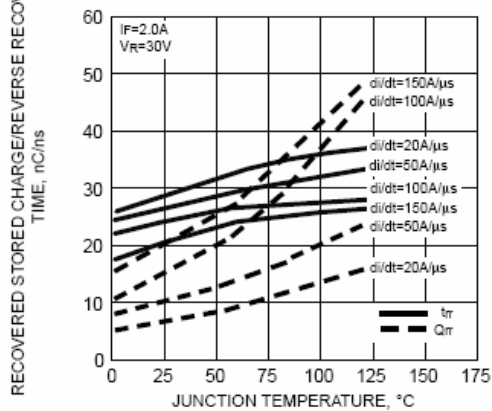


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

