


USB  
Upright Right Angle, 4 Pins, A Type, Female  
UUR-04A104-FS Series



Recommended  
P.C.Board Hole Layout

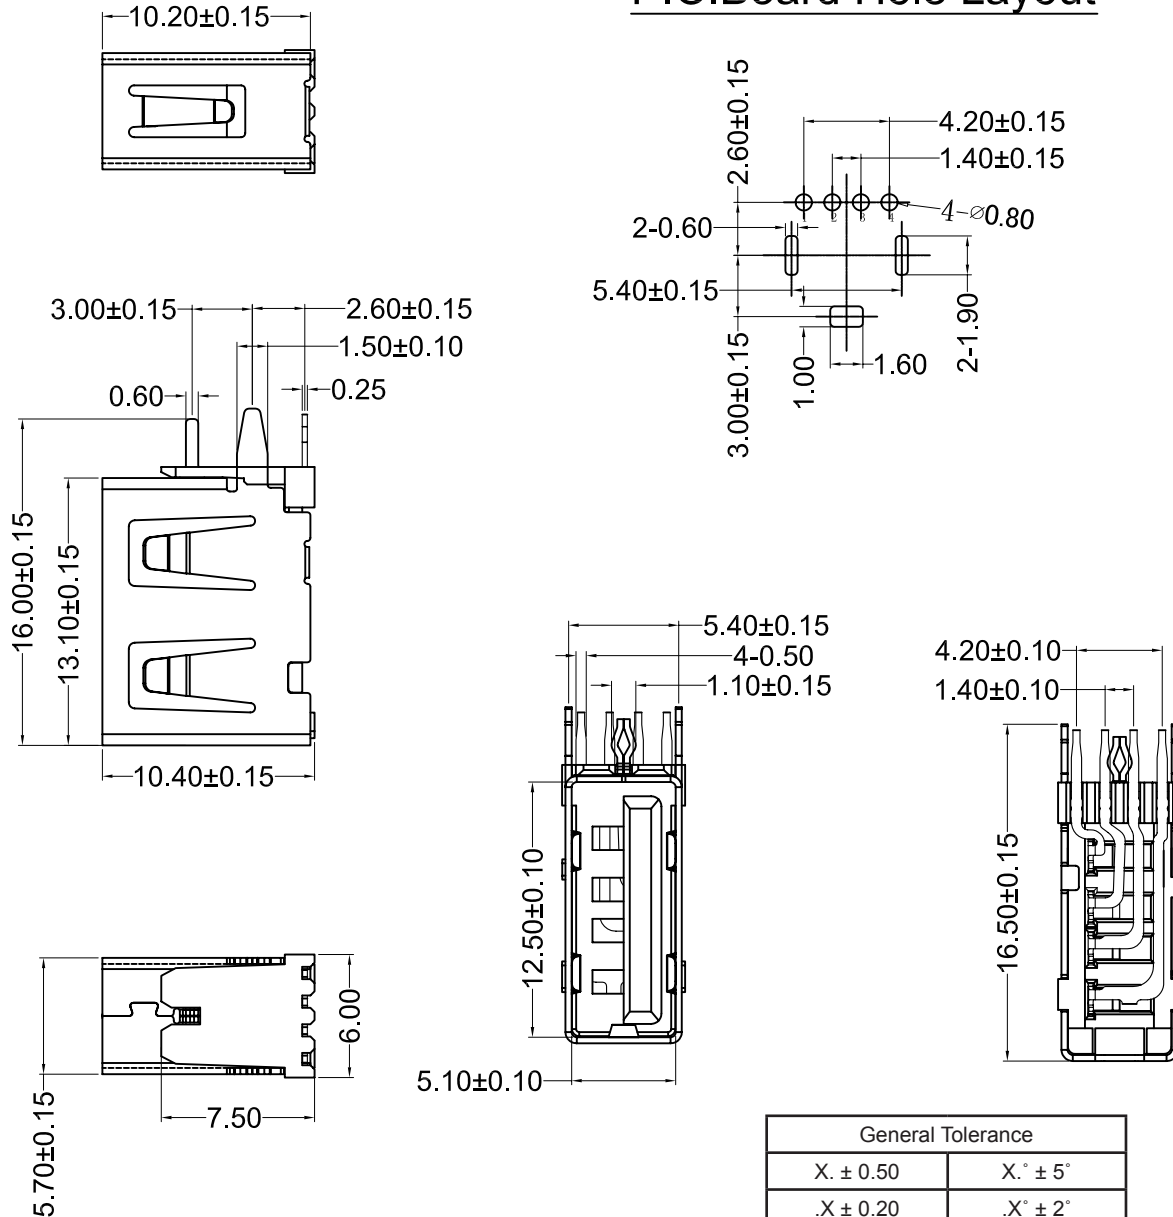

| General Tolerance |           |
|-------------------|-----------|
| X. ± 0.50         | X.° ± 5°  |
| .X ± 0.20         | .X° ± 2°  |
| .XX ± 0.10        | .XX° ± 1° |
| Units : mm        |           |

Specifications

Current Rating: 2A Max.  
Voltage Rating: 500V AC/DC  
Dielectric Withstanding Voltage: 500V/AC 1 min.  
Contact Resistance: 30mΩ Max. at 20mV Max., 50mA  
Insulation Resistance: 1000 MΩ Min. at 500V/DC for 1 min.  
Unmating Force: 1.0 to 2.0 Kgf Min.  
Contact: Phosphor Bronze C5191-EH/C2680-EH, t=0.25mm  
Contact Plating: 15μ" Gold Plated on Contact Area,  
80μ" Min. Tin Plated on Solder Area,  
50μ" Min. Nickel Underplating Over All.  
Shell: Copper Alloy, t= 0.30mm  
Shell Plating: 50μ" min. Nickel Underplating Over All.  
Insulator: Thermoplastic, UL94V-0 (ROHS, HF)

Part Numbering System

