

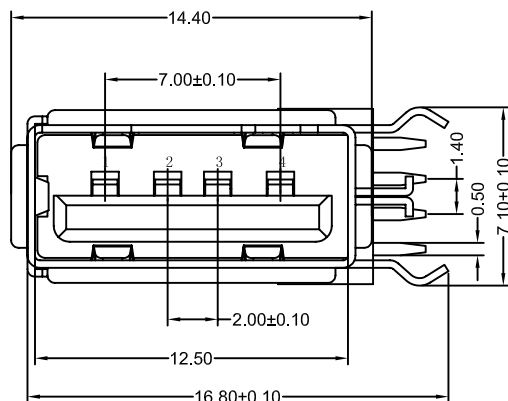
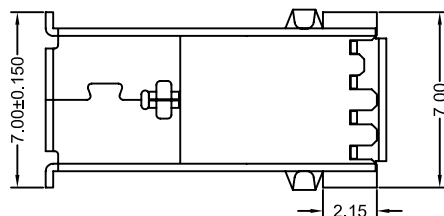
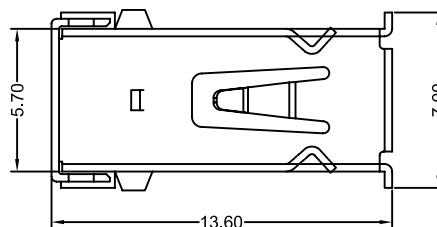


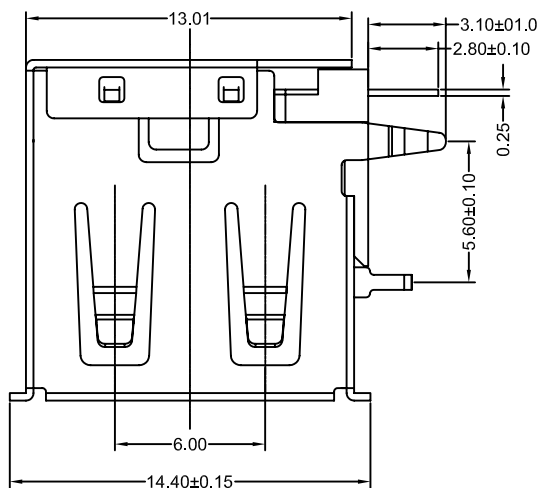

Recommended P.C.Board Hole Layout

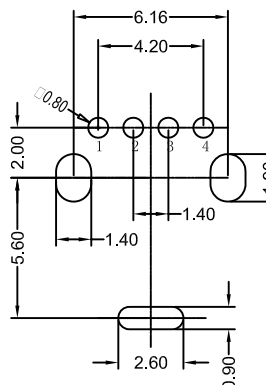

Specifications

Current Rating: 2A Max.
Voltage Rating: 500V AC/DC
Dielectric Withstanding Voltage: 500V/AC 1 min.
Contact Resistance: 30mΩ Max. at 20mV Max., 50mA
Insulation Resistance: 1000 MΩ Min. at 500V/DC for 1 min.
Unmating Force: 1.0 to 2.0 Kg Min.
Contact: Phosphor Bronze C5191-EH/C2680-EH, t=0.25mm
Contact Plating: 15μ" Gold Plated on Contact Area,
80μ" Min. Tin Plated on Solder Area,
50μ" Min. Nickel Underplating Over All.
Shell: Copper Alloy, t= 0.30mm
Shell Plating: 50μ" min. Nickel Underplating Over All.
Insulator: Thermoplastic, UL94V-0 (ROHS, HF)

Part Numbering System

UUR - 04 A 136 E - F S B

Series

No. of Pins

04

Type Option:

A = A Type

Body Length:

136 = 13.6mm

Edge Option:

E = with Edge

Contact Option:

F = Female

Contact Plating:

S = Selective Gold Flash

Insulator Color:

B = Black