


## USB Upright Right Angle, 4 Pins, A Type, Female UUR-04A1925E-FKS Series



### Recommended P.C.Board Hole Layout

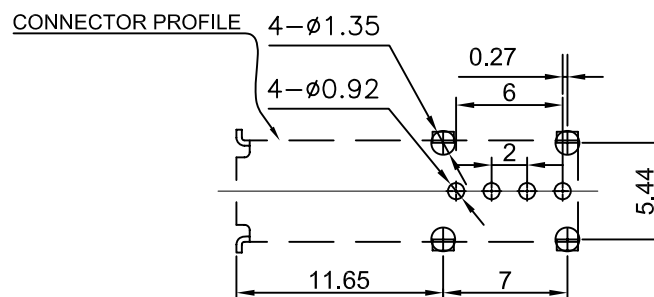

### Specifications

Current Rating: 1.5A Max.  
Voltage Rating: 30V AC(rms)  
Dielectric Withstanding Voltage: 750V for 1 min.  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 1000 MΩ Min.  
Mating Force: 3.5 Kgf Max.  
Unmating Force: 1.0 Kgf Min.  
Temperature Range: -40°C to +105°C  
Contacts: Copper Alloy, t=0.25mm  
Shell: Copper Alloy, t= 0.30mm, Nickel Plated  
Insulator: High Temperature, UL94V-0

### Part Numbering System

**UUR - 04 A 1925 E - F K S X**

**Series**

**No. of Pins**

04

**Type Option:**

A = A Type

**Body Length:**

1925 = 19.25mm

**Edge Option:**

E = with Edge

**Contact Option:**

F = Female

**Post Option:**

K = Kinked Pin

**Contact Plating:**

S = Selective Gold Flash

**Insulator Color:**

W = White

B = Black

