


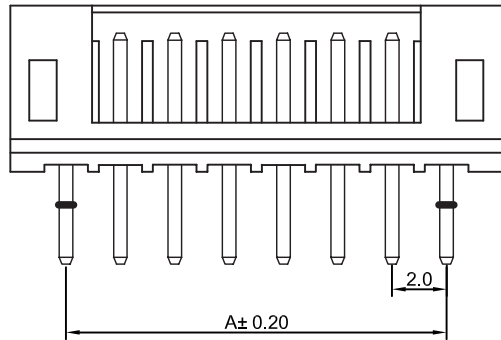



### Recommended P.C. Board Hole Layout

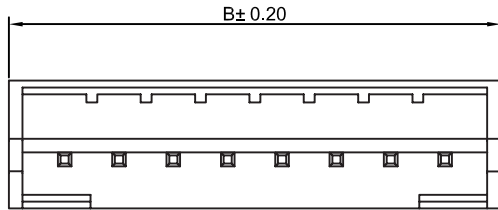

2 Pins



### Specifications

Current Rating: 1A  
 Withstand Voltage: 800V AC / 1 min  
 Insulation Resistance: 1000M ohms / min  
 Contact Resistance: 20m ohms max.  
 Temperature Range: -25°C ~ +85°C  
 Wafer: High Temp. Plastic Nylon 66, UL94V-0  
 Pin: High Strength Brass with Tin over Nickel plating  
 Applicable PC Board Thickness: 0.8 ~ 1.6mm

### Part Numbering System

**W200-J1-SS - XX T K**

Series  
 # of Contact  
 02 ~ 15  
 Contact Plating  
 T = Tin  
 Kink Option  
 K = Kinked

Contacts	Dimension mm	
	A	B
2	2.00	6.1
3	4.00	8.1
4	6.00	10.1
5	8.00	12.1
6	10.00	14.1
7	12.00	16.1
8	14.00	18.1
9	16.00	20.1
10	18.00	22.1
11	20.00	24.1
12	22.00	26.1
13	24.00	28.1
14	26.00	30.1
15	28.00	32.1

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	