




4PIN ~ 17PIN





3PIN



2PIN

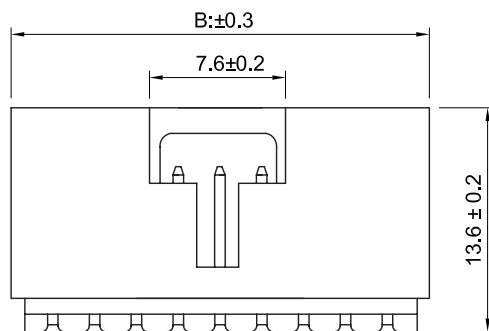

Recommended P.C. Board Hole Layout

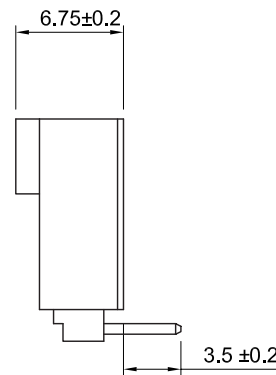

Specifications

Current Rating: 3Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20 mOhms max.
 Dielectric Withstanding: AC 600V
 Operating Temperature: -40°C ~ +105°C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0 P.B.T.
 Contact Plated: Full Tin Plated (Standard)
 Full Gold Flash

Part Numbering System

Contacts	Dimension mm	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72

W254-2R - XX X

Series

of Contact
02 ~ 17

Contact Plating
T = Tin (Standard)
G = Gold Flash

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	