



FAST RECOVERY RECTIFIER

FR201 THRU FR207

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
2.0 Ampere

FEATURES

- Fast switching speed for high efficiency
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:
260 /10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.014 ounce, 0.39 gram

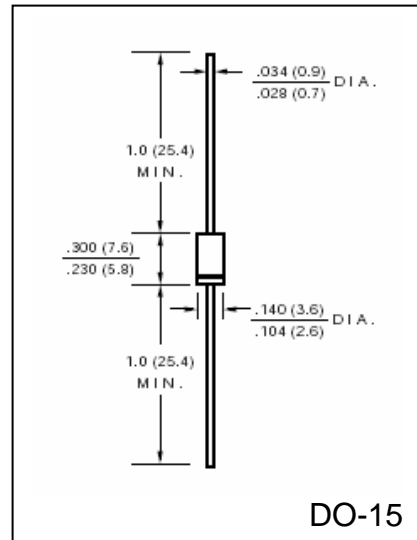

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	FR201	FR202	FR203	FR204	FR205	FR206	FR207	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length At $T_C = 75^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	70							Amps
Maximum Instantaneous Forward Voltage @ 2.0A	V_F	1.3							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	5.0							μA
$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$		200							
Maximum Reverse Recovery Time Test conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$	t_{rr}	150				250	500		nS
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	25							pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	40							$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-65 to +150)							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-65 to +150)							$^\circ\text{C}$

Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted



RATINGS AND CHARACTERISTIC CURVES FR201 THRU FR201

FIG.1-TYPICAL FORWARD CURRENT

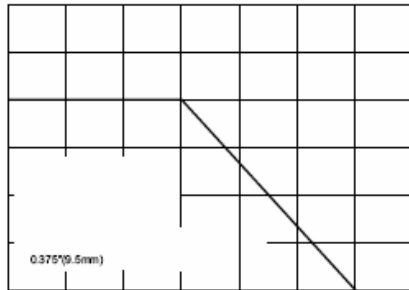


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

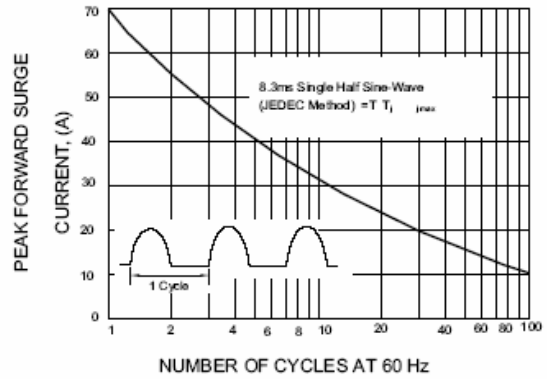


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

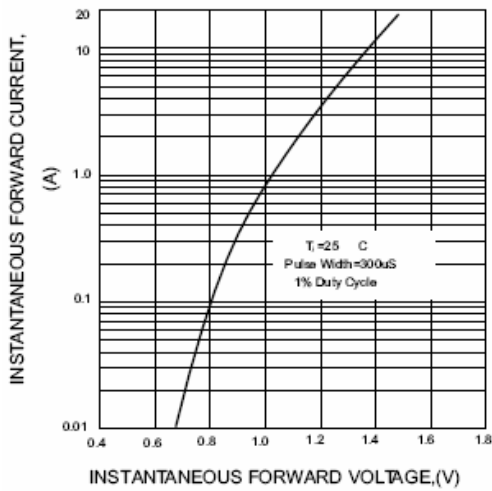


FIG.4-TYPICAL REVERSE CHARACTERISTICS

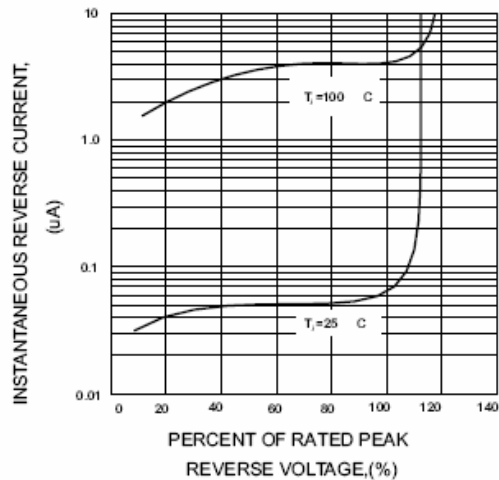


FIG.5-TYPICAL JUNCTION CAPACITANCE



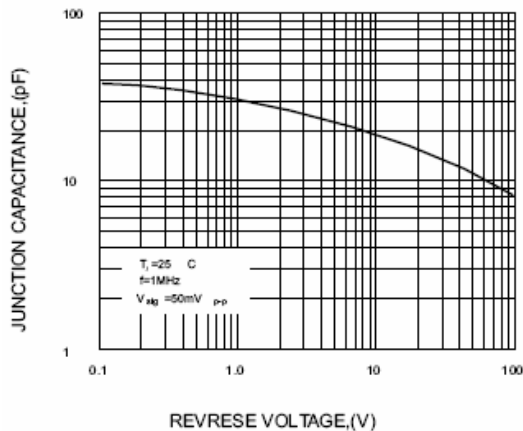


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

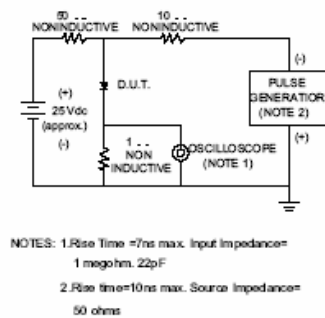

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 mega hm, 22pF
2. Rise time = 10ns max. Source Impedance = 50 ohms